


派勒·好地垫·好地面



PNLER

www.paalermat.com

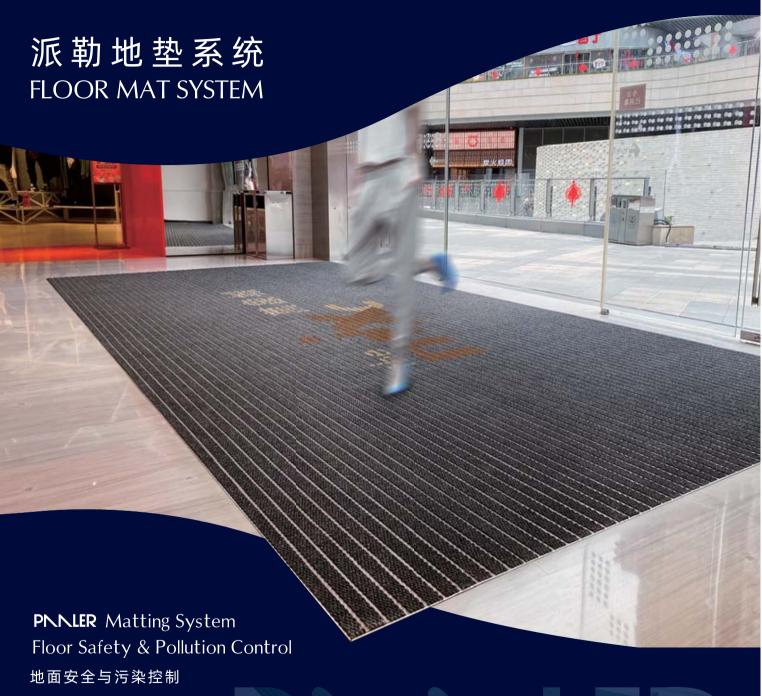

我们是谁


Who Are We

上海派勒环保科技有限公司是专业地垫系统供应商, 旗下包括商用 地垫,工业地垫,及家用地垫三大系列产品线。派勒专注于各类应 用地垫的设计,研发,生产制造以及销售,已取得20多项地垫的 产品发明专利、实用新型专利以及产品外观专利。在上海总部及江 苏常州制造中心的基础上,派勒是目前国内行业中自建覆盖华东, 华南,华北,西南,东北地区销售及服务网点的专业地垫供应商。

自2008年成立以来,伴随着中国经济与市场的迅速发展,派勒将 欧美的地面污染与控制系统的理念带入中国,始终专注于提供有效 的地垫系统解决方案,为多达20大行业提供地面问题解决方案, 不管是高星级酒店、连锁店铺、物业大楼,公共交通,高端制造, 还是家居环境,派勒,好地垫,好地面的理念深入客户心中,真正 帮助客户从源头解决地面的污染和安全问题,在为客户节约大量人 力成本的同时提升了整体空间的形象!

Shanghai Paaler Environmental Technology Co., Ltd. is a professional floor mat system supplier currently in a leading position in the domestic industry. It includes three series of product lines that are commercial floor mats, industrial floor mats, and household floor mats. Paaler focuses on the design, research and development, manufacturing and sales of floor mats for various applications, and has obtained more than 20 product invention patents, utility model patents and product appearance patents for floor mats. Based on the Shanghai headquarters and the manufacturing center in Changzhou, Jiangsu, Paaler is the only professional floor mat supplier in the domestic industry that has self-built sales and service centers in East China, South China, North China, Southwest China and Northeast China.

Since the establishment in 2008, with the rapid development of China's economy and market, Paaler has brought the concept of advanced ground pollution and control systems from Europe and the United States to China, and has always focused on providing effective floor mat system solutions for more than 20 industries, whether it is high-star hotels, chain stores, property buildings, public transportation, high-end manufacturing, or home environments, the concept of Paaler that good floor mats for good ground is deeply rooted in the hearts of customers, truly helping customers from the source to solve the pollution and safety problems on the ground, which is also save a lot of labor costs and improve the image of the overall space!

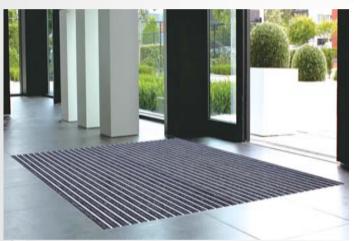





合作商家

Business Partner
























































































八大服务 **Our Services**

经过十五年的发展,我们拥有专业全面的解决方案能力,为各类企业提供高 效、专业的产品和服务。同时,依托派勒特有的CRM系统,具备完善的快速 响应一站式服务体系。

After more than fifteen years of development, we have professional and comprehensive solution capabilities to provide efficient and professional products services for various customers. At the same time, relying on Paaler's unique CRM system, it has a complete and quick response one-stop service



我们的优势

Our Advantages

上海、北京、成都、沈阳、深圳、武汉 设有全国子公司

我们的服务已经遍布31个省份265个城市







企业荣誉 **Our Honors**



国家高新技术企业



ISSA国际清洁协会 会员证书



IWBI基石级会员



BOMA会员证书



全国卫生产业企业管理协会医院 后勤管理发展分会 会员单位



中国饭店业最具价值品牌



中国旅游饭店协会 采购供应链分会理事会理事



中国建筑材料流通协会 副会长单位



金钻奖商业清洁杰出品牌



公共场所清洁杰出品牌奖



ISO 9001 质量管理体系认证证书



ISO 14001 环境管理体系认证证书



国家专利证书 30+



权威检测报告 20+



M图赏析 & 荣誉客户 Appreciation of Case Images & Honorary Customers



















酒店

万豪集团 徐州万豪酒店 成都瑞吉酒店 成都瑞吉酒店 长沙瑞吉酒店 拉萨瑞吉酒店 丽江瑞吉酒店 合肥喜来登酒店 昆明喜来登酒店 杭州钱汀万豪酒店 绍兴新昌万怡酒店 成都丽思卡尔顿酒店 天津陆家嘴万怡酒店 杭州钱江新城万豪酒店 北京珠三角JW万豪酒店 上海浦东丽思卡尔顿酒店

广州富力丽思卡尔顿酒店

深圳博林天瑞喜来登酒店

洲际集团 北辰洲际酒店 无锡君来洲际酒店 衡阳君雅洲际酒店 丽江和府洲际酒店 西双版纳洲际洒店 苏州晋合洲际酒店 上海浦西洲际酒店 镇江皇冠假日酒店 丽汀和府英迪格酒店 四川黑龙滩洲际酒店 三亚海棠湾洲际酒店 四川三岔湖洲际酒店 天津干家保洲际洒店 四川黑龙滩英迪格酒店 成都总府皇冠假日酒店 重庆保利皇冠假日酒店 杭州龙湖皇冠假日酒店

希尔顿集团

即墨希尔顿酒店 武汉世茂希尔顿 成都华尔道夫酒店 厦门华尔道夫酒店 北投诵州希尔顿酒店 北京通州希尔顿酒店 重庆嘉发希尔顿酒店 三亚保亭希尔顿酒店 南京万达希尔顿洒店 上海外滩华尔道夫酒店 杭州下沙逸林希尔顿酒店

凯宾斯基洒店

三亚海棠湾凯宾斯基酒店 苏州金鸡湖凯宾斯基大酒店 阜南汉庭酒店 重庆凯宾斯基酒店 成都凯宾斯基酒店

凯悦集团

成都W酒店

苏州W酒店

丽江凯悦酒店

兰州凯悦酒店

宁波凯悦酒店

苏州柏悦酒店

乌镇阿丽拉洒店

景德镇凯悦嘉轩酒店

济南香格里拉洒店 江苏香格里拉酒店 常州香格里拉酒店 扬州香格里拉酒店 福州香格里拉大酒店 温州香格里拉大酒店 义乌香格里拉大洒店 成都凯悦嘉轩酒店 江西南昌香格里拉酒店 苏州晋合凯悦酒店 上海浦东香格里拉大酒店 上海环球港凯悦酒店 上海静安香格里拉大酒店 无锡苏宁凯悦大酒店 上海前滩香格里拉洒店洒店

金陵酒店集团

华住酒店集团 盐城金陵酒店 昆山金陵大酒店 峨眉山花间堂民宿 南京金陵大酒店 上海中亚美爵酒店 金沙湖金陵湖滨酒店

香格里拉酒店集团 万达酒店集团

郑州文华酒店 南昌万达瑞华酒店 上海万达瑞华酒店 成都万达瑞华酒店 沈阳万达文华酒店 广西万达文华酒店 南京万汰嘉华洒店 西宁万达嘉华酒店 哈尔滨文华嘉华酒店 无锡融创文华嘉华酒店 呼和浩特万达文华洒店

锦江酒店集团


湖南锦江酒店 无锡镍汀花园酒店 缙云锦江国际大酒店 成都嘉斯曼锦江国际酒店 济南解放路亚朵轻居酒店 伪满皇宫博物馆

亚朵集团

南昌亚朵酒店 深圳福田亚朵酒店 交大亚朵轻居酒店 温州车站亚朵酒店 徐家汇美影亚朵酒店 北京朝阳门亚朵酒店 常州恐龙园亚朵洒店 兰州七里河亚朵酒店 苏州东沙湖亚朵酒店 无锡三阳广场亚朵酒店 成都领事馆路亚朵洒店 大同东信广场亚朵酒店 贵阳未来方舟亚朵酒店 杭州萧山机场亚朵酒店 西安国际港务区亚朵酒店 呼和浩特将军署亚朵酒店

旅游度假

上海油十尼度假区 北京环球影城 全国融创乐园 极地海洋世界 北海影视基地 只有河南剧场 南京博物馆 南京中山陵 上海科技馆 上海天文馆 上海城市规划馆 绍兴水上乐园 张家界天门山风景区 恒大海花岛度假村 西双版纳万达游乐园 重庆巫川县风景区 南京水游城

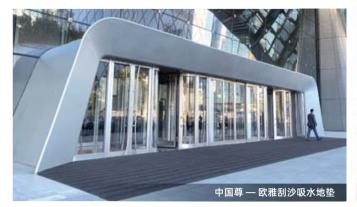











餐饮零售

星巴克连锁咖啡 肯德基连锁餐饮 苹果体验店 罗意威专卖店 哈雷机车专卖店 威尔士健身会所 始祖鸟服饰连锁 711连锁便利店 新荣记连锁餐饮 奈雪の茶连锁店 喜茶茶饮连锁店 海底捞连锁火锅店 便利蜂连锁便利店 Tims Coffee连锁咖啡 优衣库专卖店 耐克中国 GUCCI专卖店 维多利亚的秘密专卖店

公共交通

上海浦东机场 上海虹桥机场 首都机场 海口机场 重庆机场 广西机场 合肥机场 北京大兴机场 西安咸阳机场 深圳宝安机场 重庆江北国际机场 北京轨道交通集团有限公司 成都轨道交诵集团有限公司 青岛轨道交通集团有限公司 厦门轨道交通集团有限公司 上海华铁旅客服务有限公司 中国铁路北京局集团有限公司 中国铁路上海局集团有限公司

商场物业

北京中信大厦 国金中心 中银大厦 北京龙湖天街 平安大厦 北京合生汇广场 北京银泰 万科大都会 南京国金ifc 成都IFS广场 北京国贸 重庆IFS广场 北京环贸广场 重庆万象城 北京银泰in99 重庆龙湖时代天街 上海南丰城 重庆来福士广场 上海环贸iapm 成都来福士广场 上海国贸汇itc one 成都奥克斯广场 上海白玉兰广场 成都蔚蓝卡地亚 上海兴业太古汇 沈阳恒隆广场 上海徐汇日月光商场 沈阳万象城 上海北外滩来福士广场 沈阳万象汇 F海K11购物艺术中心 哈尔滨第一商场 上海月星环球港 沈阳华润大厦

学校及事业单位

中欧商学院

德威英国国际学校 上海耀华国际学校 上海宏文国际学校 中国人民大学 南京大学 南京审计学院 中国银行 国家开发银行 中国工商银行 张家港开发区政府 松江第一人民医院 温汀区人民医院 中国医学科学院血液病医院 新长安国际妇产医院 浦东妇幼第一保建医院

工厂企业

特斯拉 (上海) 有限公司 一汽大众汽车有限公司 可口可乐饮料有限公司 博世(中国)投资有限公司 中国烟草集团 唯品会信息科技有限公司 玫琳凯(中国)有限公司 诺华生物制药有限公司 西门子股份有限公司 光明乳业股份有限公司 大陆马牌轮胎有限公司 中国核工业集团有限公司 上汽涌用汽车有限公司 广州网易计算机系统有限公司 艾默生电气 (中国) 投资有限公司

> * 排名不分先后 更多地垫案例请联系我们



企业介绍 Company Introduction	01-02P
经典案例 Classic Case	03-04P
三区概念 Three Zone Concept	07-10P
地垫介绍 Floor Mat Introduction	11-64P
边条,辅材,胶水等配件的介绍 Accessories	65P
维护保养 Maintenance	66P



刮沙除尘地垫 Dust Control & Scraper Mat

铝合金型



安第斯-宽纹环扣铝合金地垫 Andes 11页



安高-铝合金地垫 Emco



安琪斯-宽纹搭扣铝合金地垫 **Angels** 13页



17页

德克嘉-铝合金地垫 Deco




安泰斯-环扣铝合金地垫 **Antius** 14页



安贝斯-宽纹环扣铝合金地垫 **Imbase** 18页

模块拼接型 知识Q&A 19-20页



皮克斯-刮沙除尘吸水模块地垫系统 Pixor 21页



皮卡索-刮沙除尘模块地垫系统 Picasso

23页

毯面型 知识Q&A 24页

15页



星雅-强力刮沙吸水地垫 Foris 25页



艾肯-超厚刮沙地垫 Akon



德雅-高级刮沙吸水迎宾垫 Doven 29页



欧雅-刮沙除尘吸水地垫 Oliva



丽雅洁-特级刮尘吸水地垫



Cero Plus 31页



莱雅-强力刮尘吸水地垫 Liya 32页



美雅-刮沙除尘吸水地垫 Miya 33页



摩雅-尊贵刮沙除尘地垫 Mone 34页




维雅-高级刮沙吸水迎宾垫 Weave 35页



剑达-刮沙除尘吸水地垫 Jett 36页



Muse



柯林-圈丝控尘地垫 Clean Plus



椰衣地垫 Coco Mat

38页









Water & Oil Absorbing Mat

知识Q&A 40页



福雅-吸水控尘尼龙地垫 Forever WOM Unicolour 41页



艾美-超强吸水吸油地垫 Absorpa 43页



艾美-增强型超级吸水吸油地垫 丽豪/富豪-贵宾地垫 Absorpa plus 44页



45页

Lovely/Fortune



彩标消毒地垫 Disinfect floor mat 46页

完美印染地垫 Perfect Logo Mat



疏水防滑地垫 Drainage & Anti-slip Mat

知识Q&A 49-50页




完美印染地垫 Perfect Logo Mat

47页




安波-超强防滑疏水地垫 Ultrablock 4.0&3.0

51页



安波-疏水防滑地垫 Ultrablock 2.0

53页




安迪非-安全防滑抗疲劳垫 Andife


55页

抗疲劳地垫 Anti-fatigue mat





格立夫/舒立夫/林立夫 超强耐磨抗疲劳地垫 Gran-tuff/Schul-tuff Link- tuff 58页



稳德福-耐磨型钢化纹抗疲劳地垫 Wonderful

59页




倍舒特-半球凸点抗疲劳垫 Bester

60页

地面保护 Ground Protection Mat



凡赛-健身器材垫 Versail



宾德-耐磨型工业地板砖 Pantex

61页

62页



卫洁-男卫生间尿斗防臭清洁系统 **Urinal Clean System**

63页



悦雅-硅胶浴室防滑地垫 Joy

64页

配件及维护保养 Accessories and Maintenance

知识Q&A 65-66页



胶水 Glue

65页



边条&接驳条 **Side Strips & Connection Strips** 65页



为什么需要有效的地面安全与污染控制地垫系统?

Why do we need the effective floor mat system for ground safety and pollution control?

90% 灰尘污染控制 Remove more than 90% of dust pollution control

据统计,75%的灰尘和湿气是由户外携带进入建筑物内,污染室内环境,大大增加清洁成 本。有效的地面安全与污染控制系统能够去除高达90%由外界带入建筑物内的灰尘与湿气 According to statistics, 75% of dust and humidity are carried into buildings from outdoors, polluting the indoor environment and greatly increasing cleaning costs. An effective ground safety and pollution control system can remove up to 90% of the dust and moisture brought into the building from the outside.





降低滑倒事故的风险

Reduce the risk of slip and fall accidents

派勒地垫均承保第三方责任险,如因产品存在缺陷导致的人身伤害,将由保险公司作出 相应赔偿,派勒建议客户使用更值得信赖的产品。

Paaler floor mats are covered by third-party liability insurance. If personal injury is caused by product defects, the insurance company will make corresponding compensation. Peller recommends customers





保护和改善室内地铺材料的外观

Protect and improve the appearance of indoor flooring materials

室内地铺材料的外观污染通常是由难以清理的大颗粒沙石和灰尘的积累与磨损造成的,通常这些污染导致室内地铺材料需要被提前更换。有效的 地面安全与污染控制系统能够避免这些不必要的成本支出。

The appearance pollution of indoor floor materials is usually caused by the accumulation and wear of large particles of sand and dust that are difficult to clean. Usually, these pollution causes indoor floor materials to be replaced in advance. An effective ground safety and pollution control system can avoid these unnecessary costs.



降低清理和维护成本

Reduce cleaning and maintenance costs

研究表明,一天当中多达几公斤重的尘土和污垢将会被行人或其他车辆设备带入建筑物内,而去除1公斤灰尘的成本要高达人民币700元,同时在 室内地铺材料的使用周期内,其维护成本高达初次购买成本的86%。在这种情况下,地垫系统大大降低了维护费用。


Studies have shown that up to a few kilograms of dust and dirt will be brought into the building by pedestrians or other vehicle in a day, and the cost of removing 1 kilogram of dust will be as high as RMB 700, and at the same time during the life cycle of indoor floor materials, Its maintenance cost is as high as 86% of the initial purchase cost. In this case, the floor mat system greatly reduces maintenance costs.



3-Zone of floor mat

"地垫三区设置"是从室外到室内的完整地垫系统设置。从大门外刮除大颗粒砂石,到达门厅后去除细沙,最终在室内擦干鞋底水渍。

3-Zone of floor mat is a complete floor mat system setting from outdoor to indoor. Scrape large particles of sand from outside the gate, remove fine sand after reaching the foyer, and finally dry the water stains on the soles of the shoes indoors.

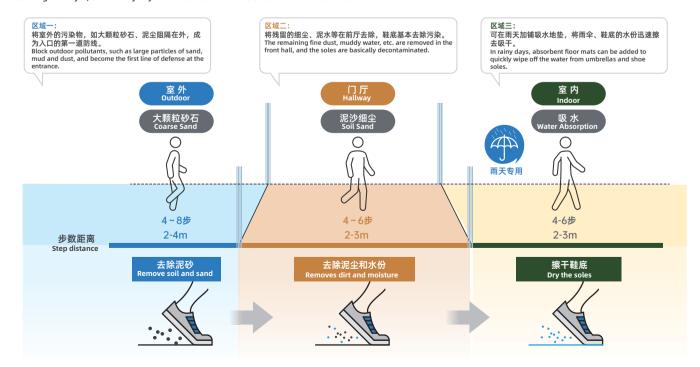



地垫百科知识

Floor mat encyclopedia knowledge

01 地毯与地垫的区别?

What is the difference between carpet and floor mat?

	地型	地毯
材质不同	材质丰富	纤维原料纺织
功能不同	清洁、防滑、防静电、抗疲劳 防震、保护地面等功能	装饰功能
使用区域不同	应用广泛,室内外均可	室内办公、居家区域
清洁方式不同	清洁简易,水洗、吸尘即可	清洁复杂,需专业人员和专业设备
使用寿命不同	耐磨耐用,使用寿命长	羊毛棉麻材质,容易霉变损坏



02 地垫可以定制吗?

Can floor mats be customized?

派勒地垫均为定制产品,不论从产品方案、地垫尺寸、 LOGO设计、施工铺设都可以满足客户一站式的定制需求。 Paaler floor mats are all customized products, which can meet the one-stop customization needs of customers in terms of product scheme, floor mat size, LOGO design, and construction and laying



03 我们的地垫安全吗?

Are our floor mats safe?

派勒地垫均采用安全的环保类材料制成,常见的劣质地垫渗入不环保和廉价材料,气味难闻浓烈,且长期在密闭环境中 使用该产品可能致癌和其它健康问题。

派勒地垫通过无毒环保检测,无异味、无毒无害、无甲醛,可放心使用。

Paaler floor mats are made of safe and environmentally friendly materials. The common inferior floor mats are mixed with non-environmental protection materials, which have an unpleasant and strong smell, and long-term use of this product in a closed environment may cause cancer and other health problems.

Paaler floor mats have passed the non-toxic and environmental protection testing, with low odor, non-toxic and harmless, and formaldehyde-free, so they can be used with confidence.



04 地垫需要阻燃吗?

Do floor mats need to be flame retardant?

国家规定的防火材料等级中: B1级为难燃性建筑材料。

难燃类材料有较好的阻燃作用:其在空气中遇明火或在高温作用不易起火,不易很快发生蔓延,且当火源移开后燃烧立 即停止。派勒全系列产品均符合国家B1级标准或行业标准。

Among the fireproof material grades stipulated by the state: B1 grade is a flame retardant building material.

Flame retardant materials have better flame retardant effect: they are difficult to catch fire in the air or under the action of high temperature,

and are not easy to spread quickly, and the combustion stops immediately when the fire source is removed. In Paaler's series of products, some products are in full compliance with national B1 standards or industry standards.



05 地垫需要清洗保养吗?

Do the floor mats need to be cleaned and maintained?



需要。地垫是地面清洁的功能类产品,长期使用会积累大量污染物,使得功能性减弱。地垫要定 期进行清洁维护,才能够确保其正常的使用效果。

详细清洁维护方法,毯面型地垫,疏水防滑类地垫,具体详见66页。 Yes, The floor mat is a functional product for cleaning the ground, which will accumulate a lot of pollutants and weaken the functionality after long-term use. The floor mat should be cleaned and maintained regularly to ensure the normal use effect.



* 派勒为我们的客户提供专业的地垫清洁维护服务,您可扫码预约 Paaler provides professional floor mat cleaning and maintenance services, you can scan the QR code to make an appointment

百城千店石里行



地垫各区域产品推荐

Recommendations of Floor Mats in Various Areas



刮除大颗粒砂石·去除泥水

Scrape off large particles of sand and remove muddy water















去除泥沙灰尘·擦去鞋底水份·雨天专用 Removing sand and dust, special for rainy days









抗疲劳·耐磨 Fatigue and wear resistance











防滑·吸水 Anti-slip and water-absorbing









防滑 Anti-slip





防滑·疏水 Anti-slip and drainage





贵宾接待·防滑 VIP reception and anti-slip






防滑·展示品牌形象 Anti-slip · show brand image





防滑·吸油 Anti-slip & oil absorption







耐磨·地面保护 Wear-resistant & ground protection





耐磨·地面保护 Wear-resistant & ground protection






防滑·吸水 Anti-slip & water-absorbing



PNNLER



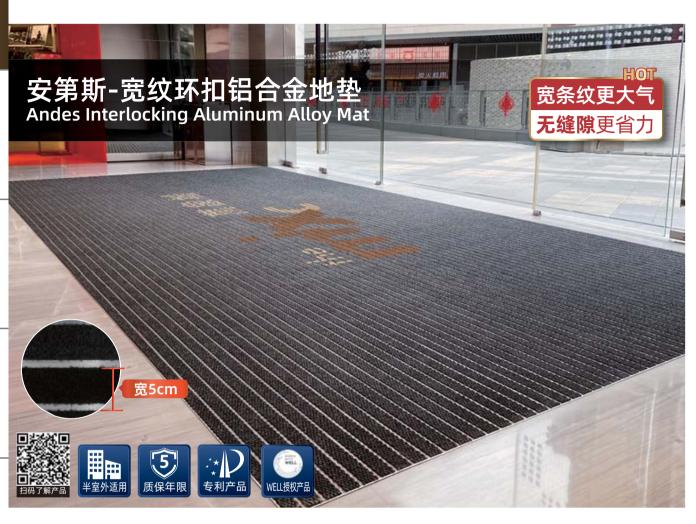

环扣封闭式无缝隙铝合金,灰尘无处可藏,易于清洁;宽条纹设计,大气美观,多种毯面可选,满足各种建筑设计风格。 Ring buckle closed seamless aluminum alloy, nowhere to hide dust, easy to clean; wide stripe design, beautiful atmosphere, a variety of blanket options to meet various architectural design styles.





毯面颜色 Blanket color

多种色系、各式花纹, 可搭配不 同设计风格,适用各种场合。 A variety of colors and patterns can be matched with different design styles for various occasions.





浅灰色 Light grey







深灰色 Dark grey



深红色 Dark red



深灰色 Dark grey

棕色 Brown

黑色 Black



棕色 Brown



封闭式无隙表层*,*便于清洁维护 Closed surface without gaps for easy cleaning and maintenance




第二代互锁结构, 更不易变形。

The second-generation interlocking structure is less prone to deformation.



灰尘污物都落在地垫上方,方便日常清洁。 Dust and dirt all fall on the floor mat, which is convenient for daily cleaning.



传统铝合金,灰尘通过缝隙,落于后部,藏 污纳垢,难以清理。


Traditional aluminum alloy, dust is difficult to clean.



更强大的除尘效果

More powerful dust removal effect












更新颖的**LOGO**展现 More novel LOGO display

① 不锈钢镶嵌



② 毯面镶嵌



③ 炫彩发光(内配遥控器,支持12种单色)








更新颖的LOGO展现,提供更多元的品牌展现方式,符合不同的设计风格和需求。 More novel logo display, providing more diversified brand display methods, in line with different design styles and needs.

两种铺设方式 Two laying methods

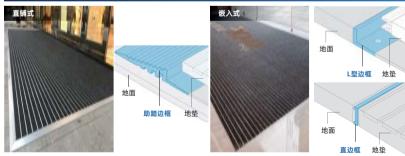

清洁维护 Cleaning

日常清洁:用吸尘器吸尘。

深度清洁: 用吸尘器吸尘并清扫之后, 地垫可以用高压清洗装备进行喷射清洗。

Daily Cleaning: Use vacuum cleaner to clean the dust.

Deep Cleaning: After vacuum aspiration and cleaning, floor mat can be cleaned with high pressure jet

cleaning equipment.

适用区域 Suitable Area

适用于商业环境及人流量密集区域,如酒店、商场、写字楼、机场等出入口区域。

Suitable for commercial environments and areas with high pedestrian traffic, such as entrance areas of hotels, shopping malls, office buildings, airports, etc.

技术参数 Technical Specification

地垫型号 Product Type	KB1502	KB1504	KB1506	KB1507	KB1509	
毯面材质 Inlay Textile	艾肯 Akon	德雅 Doven	摩雅 Mone	星雅 Foris	莱雅 Liya	
铝材材质 Aluminum Material		铝镁合金 Al Mg Si A	lloy			
铝材壁厚 Wall Thickness	1.5mm					
铝材高度 Aluminum Height	16mm					
型材拼接宽度 Profile Assembly Width	50mm					
地垫总高 Total Height	20mm					
产品结构 Product Structrue	灰尘落入 Interlocki structure	(公母扣)互 井坑,方便清 ng profiles , no gaps t lean and m	吉维护 (male and o avoid du	d female b	ouckle)	
铝架底部 Bottom	粘合发泡 Wear resist buffer and	净音绵,缓冲 tant foam ma silencing	中吸音 aterial mute	sponge at t	he bottom,	
阻燃等级 Flammability	GB8624-	2012:B1(C)			
防滑等级 Antiskid Grade	R11 专利产品 是 Patented product Yes					
产地 Place Of Origin	中国 China	/ F	、流量 ootfall		≥5000	

油






互扣式宽条纹设计,无缝隙易清洁;更轻薄的铝合金,无需井坑铺设,适用场景多样化。

Interlocking wide stripe design, seamless and easy to clean; thinner aluminum alloy, no need for pit laying, suitable for diverse scenarios.

技术参数 Technical parameter

地垫型号 Product Type	DB1202	DB1204		DB1206 D		B1207	DB1209	
毯面材质 Inlay Textile		德雅 Dover	า	摩雅 Mone	_	雅 oris	莱雅 Liya	
毯面产地 Place of Origin		欧洲 Europ	e			国 SA	欧洲 Europe	
产品结构 Product Structure	搭扣型材(公母 Buckle interlock the pit, easy to	king pro	ofiles s	地垫无间隙,避免 tructure, no gaps intain	灰尘 to	上落入井坑, avoid dust	方便清洁维护 falling into	
铝架底部 Bottom	粘合发泡静音绵,缓冲吸音 Wear resistant foam material mute sponge at the bottom,buffer and silencing							
铝材壁厚 Wall Thickness	1.2mm		防滑等级 Antiskid Grade		R11			
铝材高度 Aluminum Height	8mm		地垫 Tota	总高 l Height		11mm		
型材拼装宽度 Profile Assembly Width	5cm		阻燃等级 Flammability			GB8624-	2012: B1 (C)	
专利产品 Patented product	是 Yes		人流 Foot			≥5000		



互锁设计,无镂空结构,底下不藏灰 Interlocking design, no hollow structure, no hidden dust underneath



无钢丝串联设计,封闭式连接,灰尘污垢都在地垫表面,方便清洁 No steel wire series design, closed connection, dust and dirt are on the surface of the floor mat, easy to clean.

清洁维护 Cleaning

日常清洁:用吸尘器吸尘。

深度清洁: 用吸尘器吸尘并清扫之后,地垫可以用高压清洗装备进行喷射清洗。

Daily Cleaning: Use vacuum cleaner to clean the dust.

Deep Cleaning: After vacuum aspiration and cleaning, floor mat can be cleaned with high pressure jet cleaning equipment.

适用区域 Suitable Area


深灰色


适用于各种商业环境及人流量密集区域,如写字楼,接待室,会议室,走道公寓等各类出入口。 Suitable for various commercial environments and areas with high pedestrian traffic, such as office buildings, reception areas, conference rooms, corridors, apartments, and other types of entrances.

N多种毯面选择 A variety of carpet surface options

多种色系、各式花纹,可搭配不同设计风格,适用各种场合。

A variety of colors and patterns can be matched with different design styles for various occasions.











由铝合金与橡胶条串联而成,可收卷清理;宽纹毯面有效吸水除尘,大气美观。

It is made of aluminum alloy and rubber strips in series, which can be rolled and cleaned; the wide-grained carpet surface effectively absorbs water and dust, and the atmosphere is beautiful.

● 封闭型 Closed type

无缝隙橡胶条,底部不藏灰 Seamless rubber strip, no dust hidden at the bottom.








橡胶条串联 Rubber strips in series

疏水型 Drainage type

刮沙除尘的同时还能疏水防滑 While scraping sand and dust, it is also drainage and anti-slip.



正面-丙纶毯面 Front - polypropylene blanket



Reverse-PVC anti-slip back



疏水孔 Drainage pores

技术参数 Technical parameter

毯面材质 Material	超强刮沙合成纤维 Super strong sand scraping synthetic fiber	阻燃性 Fire Retardant	EN13501:Dfl-S1
总高 Thickness	16mm	铝合金材质 Aluminum Profile	6063-T5
最大宽度 Maximum L to R	2.5m	边框高度(另配) Border Height	12mm
人流量 Footfall	≥5000		

清洁维护 Cleaning

封闭型结构可直接用吸尘器清理;疏水型结构用吸尘器或水枪冲洗; The closed structure can be cleaned directly with a vacuum cleaner; The drainage structure is washed with a vacuum cleaner or water gun.

适用区域 Suitable Area

适用于商业环境及人流量密集区域,如酒店、商场、写字楼、机场等出入口 区域.

Suitable for commercial environments and areas with high pedestrian traffic, such as entrance areas of hotels, shopping malls, office buildings, airports, etc.

毯面颜色 Color



黑色 Black



灰色 Grey





咖啡色 Brown 银色 Silver







欧洲的铝合金地垫系统,实用主义和艺术设计的完美结合,深受国内外设计师青睐。
The aluminum alloy floor mat system from Europe is a perfect combination of practicality and artistic design, highly favored by designers both domestically and internationally.



可收卷的铝合金地垫,方便日常清理地垫底部灰尘 The rollable aluminum alloy floor mat allows for easy cleaning of the dust on the bottom of the mat in daily use.



可设计出更独特的门厅效果, 与众不同 It can create a more unique entrance effect and stands out with its exceptional high-end quality.



多种组合,根据不同人流量和场景定制产品 Customizable products

PNNLER 派勒·好地垫·好地面

EMCO门厅地垫-速览

型号说明 (按结构形式分类)

Е	适用于超大负荷和极端负荷场合的门厅地垫(CONSUL型)			
G	橡胶条		СВ	毛刷
GK	带刮条的橡胶条		R	粗糙棱纹平布衬垫
GCB	带毛刷的橡胶条		RK	带刮条的粗糙棱纹平布衬垫
V	乙烯基衬垫		RG	带橡胶条的粗糙棱纹平布衬垫
K	带刮条的乙烯基		RC	带毛刷的粗糙棱纹平布衬垫
RV	带乙烯基衬垫的粗糙棱纹平布衬垫		В	条刷

衬垫和附加配件:适用于大、小颗粒灰尘和水份

区域	泥尘类型	详细描述	气候影响	推荐衬垫	可增强效果的 附加配件*	推荐地垫类型
1	**	道路尘土、头发、沙子、灰烬、织物	已做好防护(内)	毛刷(CB) 棱纹平布-乙烯基(RV) 橡胶(G)	刮条 (K)	RG,CB,RCB RK,RV
	大颗粒 尘土	纤维、小树叶和 小树枝、碎石片、 粗沙、小鹅卵石	未做防护(外)	毛刷(CB) 橡胶-毛刷(GCB) 乙烯基(V)	刮条 (K) 条刷 (B)	G,CB,GCB GK,V,VK
2	小颗粒尘土	道路尘土、头发、沙子、灰烬、织物纤维、小树叶和小树枝等	已做好防护(内)	棱纹平布(R) 棱纹平布-橡胶(RG) 棱纹平布-毛刷(RCB) 棱纹平布-乙烯基(RV) 橡胶[G)	刮条 (K)	R,RG,RCB RK,RV
			未做防护(外)	毛刷(CB) 橡胶-毛刷(GCB) 乙烯基(V)	刮条 (K)	G,GCB,GK V,VK

^{*}仅在购买DIPLOMAT型地垫时才可以获得该附加配件

负荷示例

-	"正常"到"较大"人流量	铝合金型材壁厚1.0mm 机关大楼、银行、学校、中等客流量的商店(每天通行次数在250-2000次之间)
kg	"超大"人流量	铝合金型材壁厚1.8mm 购物中心、机场、客流量非常大的大门入口(每天通行次数超过2000次)

适宜外部区域铺设的门厅地垫

负荷*	BE	G	V	GK	VK VK	GCB	VCB	СВ	RE	可通行行人/车辆
	17	517G	517V	517GK	517VK	517GCB	517VCB	517CB	20	购物车、轮椅、搬运
	22	522G	522V	522GK	522VK	522GCB	522VCB	522CB	25	车(GK和GCB时请注意!)*
	22	522E/G	522E/V			522E/GCB	522E/VCB	522E/CB	25	另外还可通行: 轿车、托拉车

适宜内部区域和有顶层的外部区域铺设的门厅地垫

负荷*	BE	R	RK	RB	RV	RCB	RE	可通行行人/车辆
	17	517R	517RK			517RCB	20	购物车、轮椅、搬运
	22	522R	522RK	522RB		522RCB	25	车(RK时请注意!)*
	22	522E/R			522E/RV	522E/RCB	25	另外还可通行: 轿车、托拉车

BE=门厅地垫的结构高度(mm); RE=门厅地垫的框架高度(mm); *装刮条和毛刷的门厅地垫在一-定条件下可以通行车辆! 详情请垂询我们。

清洁维护 Cleaning

日常维护:用吸尘器吸尘。 深度维护: 用吸尘器吸尘并清扫之后, 地垫可以用高压清洗装备进行喷射清洗。

cleaned with high pressure jet cleaning equipment.

适用区域 Suitable Area

适用于商业环境及人流量密集区域,如酒店、商场、写字 楼、机场等出入口区域。

Daily Maintance: Use vacuum cleaner to clean the dust.

Deep Maintance: After vacuum aspiration and cleaning, floor mat can be such as hotels, malls, office buildings, airports, etc.

R的颜色



No.220浅灰色 (常备库存)



No.200煤黑色 (常备库存)





No.420琥珀黄 (常备库存)



No.114湖蓝色(常备库存)



No.374淡紫色 (需预定)



No.113蓝灰色 (需预定)



No.445深棕色 (需预定)



No.305绛红色 (需预定)



No.050翡翠绿 (雲预定)



No.100宝石蓝 (需预定)



No.430卡其色 (需预定)




No.112葡萄紫 (需预定)








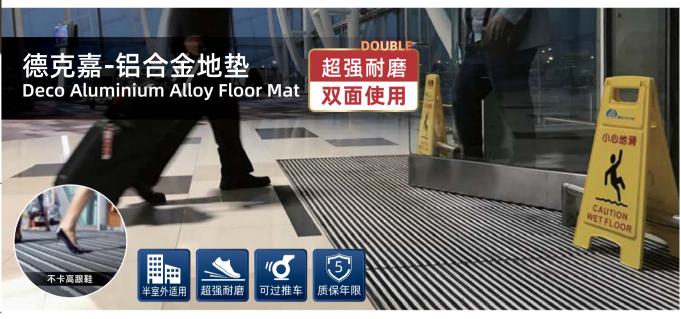

适合高人流量的铝合金地垫。采用铝合金与橡胶毯面间隔串联的工艺,双层+双面结构,双倍的使用寿命和牢固度: Suitable for high-traffic areas, the aluminum alloy mat features a construction that combines aluminum alloy with rubber matting in a series of interlocking sections. With a double-layer and double-sided structure, it offers twice the lifespan and durability.



500公斤手推车来回滚动测试,达到10万次级别而未变形或严重磨损。 It has been tested by repeatedly rolling a 500kg handcart back and forth, reaching the level of 100,000 cycles without deformation or significant wear.



还能减震消音和锁水。

With an aluminum alloy frame and vertically arranged rubber velvet surface as the load-bearing substrate, the product is not only resistant to deformation but also provides shock absorption, sound insulation, and water locking properties.

清洁维护 Cleaning

日常维护:用吸尘器吸尘。

深度维护:用吸尘器吸尘并清扫之后,地垫可以用高压清洗装备进行喷射清洗。 Daily Maintance:Use vacuum cleaner to clean the dust.

Deep Maintance: After vacuum aspiration and cleaning, floor mat can be cleaned with high

pressure jet cleaning equipment.


适用区域 Suitable Area

适用于商业环境及人流量密集区域,如酒店、商场、写字楼、机场等出入口区域。 office buildings, airports, etc.

承重实验对比 Comparison of load-bearing experiments 承重力强, 可过叉车 承重力不够, 易变形

技术规格 Technical Specification

	铝合金条 Aluminum Alloy						
材质 Material	橡胶毯条 Rubber Strip with Textile Layers						
Material	2.35mm高强度连接钢线2.35mm Liking Steel Wire						
纱线材质 Yarn Material	聚酯纤维 Polyester						
橡胶毯面宽度 Width	1.5cm单条 Single Wiper		3.0cm双条 Double Wipe	er			
总高 Total Thickness	12 mm	18mm	12 mm	18mm			
重量 Weight	13kg/m²	19kg/m²	14kg/m²	20kg/m²			
安全 Safety Design	高跟鞋可安全道 High-Heel Fri						
抗耐磨性 Wear Resistance	通过500kg负重 Passed 500kg	i的手推车 loaded tr	来回十万次碾压测试 olley test for 1000	; 00 cycles			
承重车辆 Wheel Traffic Affordability	叉车、行李推车 Forklifts truck		车、轮椅 e trolley/Box truck	/Wheelchairs			
双面设计 Double Side	设计为双面可序 Could be reve		命加倍 tend the product'	s life-span			
阻燃测试 Fire Retardant Test	EN 13501 Clas	ss Bfl s1					
荷重 Max Load	≤6400Kg/m²		颜色 Colors	黑色,灰色 Black, Grey			
人流量 Footfall	≥5000		产地 Place Of Origin	中国 China			



双条灰色

双条黑色





Suitable for commercial environments and high-traffic areas such as hotels, shopping malls,





安贝斯采用带孔橡胶连接条的互锁结构,无需要钢丝绳即可串联,多毯面选择,美观大气,方便清洁,铝合金地垫中的精品之作。 The IMBASE has unique interlocking design of ring shaped section with perforated rubber connecting strip, it can be connected in series without wires. multi carpet surface selection, beautiful aosphere, convenient cleaning, fine work in aluminum alloy floor mats.





打破传统铝合金地垫结构设计,使用带孔橡胶连接条互锁设计,无需钢丝 绳串连

Broken the structure design of the traditional aluminum mat, interlocking with perforated rubber connecting strip design, no wire rope.

镂空结构*,*灰尘留于表面*,*污水流于下面 Hollow structure, dust left on the surface, sewage flow below





橡胶连接条小孔镂空连接结构,灰尘污物都落在地垫上面,同时又可以 疏导水流,只需清洁地垫上面。

The rubber connecting strip has a small hole hollow connection structure, so that dust and dirt fall on the floor mat, and at the same time it can dredge the water flow, and only need clean floor mat.

技术参数 Technical Specifications

地垫型号 Product Type	AB1502	AB1504	AB1506	AB1507	AB1509			
地垫材质 Inlay Textile	艾肯 Akon	德雅 Doven	摩雅 Mone	星雅 Foris	莱雅 Liya			
产品结构 Product Structure	Perforated rubb	er connecting str	落入井坑,可疏导z ip interlocking pr dredge the water	ofiles structure, n	o gaps to avoid			
铝架底部 Bottom	粘合发泡静音绵, Wear resistant f		ite sponge at the	bottom, buffer a	nd silencing			
铝材壁厚 Wall Thickness	1.5mm							
铝材高度 Aluminum Height			8mm					
地垫总高 Total Height		11mm						
型材拼装宽度 Profile Assembly Width			5.6cm					
防滑等级 Antiskid Grade			R11					
阻燃等级 Flammability		GB8	624-2012:B1					

清洁维护 Cleaning

日常吸尘器吸尘,定期可采用高压清洗装备进行清洗。 Daily vacuum cleaners use vacuum cleaning equipment for cleaning.

适用区域 Suitable Area

适用于各种商业环境及人流量密集区域,如写字楼,接待室, 会议室,走道公寓等各类出入口。

Suitable for various commercial environments and high-traffic areas such as offices, reception areas, conference rooms, hallways, and entrances of apartments.



L型边框 搭配嵌入式铺设

艾肯



























区域3|室内 位置: 内部空间

目标: 移除残留的水分和小颗粒

推荐使用: 福雅 41页、艾美增强型 44页

Location: Interior space Purpose: Remove residual moisture and small particles Recommendation: Forever P41, Absorpa plus P44

区域2|前厅 位置:门厅或防风门等封闭的建筑物入口

目标: 截留污垢、碎屑和水分

推荐使用: 皮克斯 21页 Location: Enclosed building entrances such as foyers or storm doors Objective: Retain Dirt, Debris and Moisture

Recommendation: Pixor P21

位置:建筑物入口的外部 目标:截留砂石、重污垢颗粒和水分,包括雪、盐和沙子等

推荐使用: 皮卡索 23页 Location: Exterior of building entrance

Purpose: Retain grit, heavy dirt particles and moisture, including

snow, salt and sand

Recommendation: Picasso P23








01 常用于人流量高、高端商业环境 Commonly used in high-traffic and upscale commercial environments.

根据研究表明,人流量超过5000人次每天的场景,乐忠于在户外使用模块型地垫;户外到室内的场景需要进行大颗粒除尘,细沙除尘、吸水去污。模块型地垫,铺设具有一体型,更加大气。其中选择频繁的群体类型是医院、景区乐园、高端酒店、高端商场、公共交通枢纽。 According to research, in scenarios with a daily foot traffic exceeding 5000 people, LeZong is dedicated to using modular mats outdoors. For scenarios transitioning from outdoor to indoor, it is necessary to perform coarse particle dust removal, fine sand dust removal, and water absorption and stain removal. The modular mats are designed to have an

integrated structure, providing a more sophisticated appearance. The frequent user types for these mats include hospitals, scenic parks, high-end hotels, high-end malls, and public transportation hubs.







02 有无井坑皆可使用,整体性高要求的设计需求 It can be used with or without pit, which meets the design requirements of high integrity.


对井坑没有强制性要求,由于模块设计有专属的斜坡边条,可满足直接铺设的要求。且产品自重性很强,可以牢牢的固定在地面上,不会有被踢起位 移、绊倒的风险。

There is no mandatory requirement for the pit, because the module is designed with an exclusive slope edge, which can meet the requirements of direct laying. And the product has a strong self-weight and can be firmly fixed on the ground without the risk of being kicked up, displaced or tripped.

异形拼接、井坑皆适用 Suitable for special-shaped splicing and well pits







03 单片模块设计,更替成本更低 Fast installation and lower replacement costs

模块式卡扣设计,像拼图一样简单敲击安装。每块产品都是独立的,损坏后局部替换简便。相比大面积的整体性产品,可节约更多 维护替换成本。

Modular snap design, easy to knock and install like a puzzle. Each product is independent and easy to replace locally after damage. Compared with large-area integrated products, it can save more maintenance and replacement costs.



安装简单快捷 Easy to install



模块片材拼接



用塑料榔头敲打拼紧




用尺子和美工刀轻松切割

水水吸 油



模块式结构,可自由拼接,安装简单快捷;可安装在井坑、或者配上适合的边条直接铺设在地面上,适用于高人流量、高端商业场景的出入口。 The modular structure can be freely spliced, and the installation is simple and quick; it can be installed in the pit, or can be directly laid on the ground with suitable edge strips, which is suitable for the entrance and exit of high-traffic and high-end business scenarios.



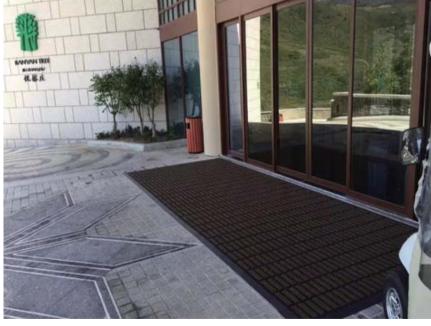









深棕色 Dark brown



深灰色 深红色

Dark grey Dark red





棕色 Brown



深灰色 红色 Dark grey Brown



蓝色 Blue



黑色





Dark grey Brown Black Brown 超过14种的毯面选择,可以任意搭配你需求的设计风格和颜色。



皮克斯 VS 市面常见三合一 Pixor VS common three-in-one in the market

① 耐磨度对比 Durability



耐磨性强,皮克斯地垫使用2年依旧如新,刮沙能力不减 after 2 years of use, and the sand scraping Strong wear resistance, ability is not reduced.

② 产品自重对比 Product weight comparison



皮克斯自重比其他产品高出50%,不易移位踢绊 The weight of Pixar is 50% higher than that of other products, and it is not easy to shift and trip.

无毯面和有毯面互拼,设计图案多样化 The non-carpet surface and the carpet surface are combined with each other, and the design patterns are diversified




除尘能力更佳,使用成本更经济















设计方式多样化 Diversified design methods



模块互拼,色彩任搭 Module interlocking



镶嵌logo Inlaid logo



技术参数 Technical Specification

产品型号	A00型	A型	F型
Product Model			
模块本体材料 Modular Tile Material	抗紫外线PVC Unti-UVPVC		
模块结构 Modular Tile	半封闭式 Semi Closed Cor	nstruction	
镶嵌毯面 Inserted Textile		挂、美雅、莱雅、摩雅 is、miya、Liya、 Mone	
厚度 Total Height Backing	12mm无毯面	12mm 有毯面	16mm 有毯面
模块尺寸 Tile Size Total Height	外形尺寸205 m r 安装尺寸195mm		
边条尺寸 Edge Size	195mmx80mm		
转角 Corner Size	80mmx80mm		
室外耐温范围T emperature Resistance	-30°C ~ 50°C		
抗磨性能 Wear Resistance	6600 cycles		
阻燃 Flammability	GB8624-2012,B	1	
产地 Place Of Origin	中国 China		
人流量 Footfall	≥5000		

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各

Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, aparents, and other types of entrances.

清洁维护 Cleaning


建议每日用吸尘器清洁,定期采用低泡清洗,清洗水温不超过60℃。 Using vacuum daily cleaning, Periodic cleaning by injection/extraction. Water temperature should not exceed 60°C.





模块拼装式结构,可用在纯户外环境,滤水防滑,能适应车站,机场,医院,商场等高人流环境。 Modular sturcture, suitable for the outdoor and the high traffic situation such as train station, airport, hospital, shopping mall etc.

镂空疏水,纯室外铺设 Hollow out and drainage, suitable for outdoor



产品自身重,不易移位 The product is heavy and no gression



双色互拼,醒目感倍增 Color block splicing, eye-catching





技术参数 Technical Specification

	4-18-61 (4-D) (C
模块本体材料 Modular Tile Material	抗紫外线PVC Unti-UV PVC
顔色 Color	石墨黑
	Graphite
模块结构 Modular Tile Construction	镂空通底式 Open Construction
镶嵌毯面 Inserted Textile	无 无
厚度 Total Height	10mm
模块尺寸 Tile Size	外形尺寸205 mmx205mm 安装尺寸195mmx195mm
拼接尺寸 Edge Size	195mmx195mm
边条尺寸 Edge Size	195mmx80mm
转角尺寸 Corner Size	80mmx80mm
模块重量 Total Weight	185g/pcs
室外耐温范围 Temperature resistance	-20°C ~ 60°C
抗磨性能 Wear Resistance	6600 cycles
阻燃 Flammability	GB8624-2012,B1
产地 Place of Origin	中国 China
专利产品 Patented Product	是 Yes
人流量 Footfall	≥5000

清洁维护 Cleaning

日常维护: 用吸尘器吸尘

深度维护:用吸尘器吸尘并清扫之后,地垫可以用高压清洗装备进行喷射清洗。

Daily Maintance: Use vacuum cleaner to clean the dust.

Deep Maintance: After vacuum aspiration and cleaning, floor mat can be cleaned with high pressure jet cleaning equipment.

适用区域 Suitable Area

适用于高人流量出入口,如机场、商场、酒店、医院、车站等。 Suitable for high-traffic entrances such as airports, shopping malls, hotels, hospitals, and train stations.



Black



黄色 (其他颜色可定制) Yellwow (customize)



01 刮沙除尘地垫的基本原理 The basic principle of scraping sand and dust-removing floor mats







尘土隐藏在地垫中,不产生扬尘 Hidden in the floor mat does not generate dust



刮沙除尘能力差,由于凹凸结构问题,砂 砾在凹槽中无法再持续被摩擦隐藏,容易 导致浮尘。



派勒星雅强力刮沙垫的"刮、 副其实,表面无尘土才能杜绝

02 毯面材料如何区分和选择? How to distinguish and choose blanket materials?

较大的容纳尘土空间

Larger room for dust

总的来说,尼龙是更优质的一种材料,兼具刮沙和吸水功能,且各项性能都表现良好。但丙纶也是 常用的刮沙除尘地垫之一,其优点为高性价比。

In general, nylon is a better material, with both sand-scraping and water-absorbing properties, and all properties perform well. However, polypropylene fiber is also one of the commonly used sand scraping and dust removal floor mats, and its advantages are high cost performance.

	耐磨型	色牢固	吸水性	回弹性	阻燃性	价格	
丙纶						低	极位
尼龙6						一般	优良如
尼龙66						高	一角

03 圈绒和簇绒的区别? What is the difference between looped and tufted?



刮除颗粒尘土

Scrape off particulate dust

簇绒结构

开放式簇绒结构的接触面积更大, 鞋底刮沙除尘的效果更 好,且更容易进行日常清洁。

The open tufted structure has a larger contact area, better scraping and dust removal, and easier daily cleaning.



圈绒结构

用结构保证回弹性,适用于较差产品。 Use structure to ensure resilience, suitable for poor products.

04 毯面染色方式有哪些不同? What are the different ways of dyeing on the blanket?







原液染色

原液染色工艺生产的同质透心纤维加工的纱 线,再纺织出来的毯面,色牢度佳。

The varn processed by the homogeneous core fiber produced by the dope dyeing process, and then the carpet surface spun out has the best color fastness.





在白色的胚毯面上喷墨打印各种图案, 实现 丰富有层次的图案效果。

Inkiet printing various patterns on the white blank surface to achieve rich and layered pattern effects.

05 有哪些可以定制的LOGO形式? What LOGO forms can be customized?

派勒具有独立的设计部门,可及时响应定制Logo设计需求。

Paaler has an independent design deparent, which can respond to customized Logo design needs in a timely manner.

① 镶嵌LOGO Inlaid LOGO

首钢地产

将不同颜色和材质的毯面用镶嵌工艺粘合, LOGO可以 选择各种毯面进行定制,呈现立体、大气的效果。



② 印染LOGO Printing and dyeing LOGO 可以满足更具有个性的定制要求,呈现丰富的颜色

和图案,让你的品牌形象富有创意





③ 彩标LOGO/烫金 Color logo/Bronzing 派勒独有工艺,可以选择不同毯面材质和多种颜色组

歡迎光膜

Welcome



*更多印染图案,翻阅47页

06 清洁维护方法 Cleaning and maintenance methods

① 日常清洁

Daily Cleaning

高人流区域 —— 每天 ● 低人流量区域 —— 2-3天

强烈建议使用直立式滚刷吸尘器! 能够将纱线 根部的灰尘翻起,吸尘更彻底,并起到修整簇 绒的效果!

② 深度清洁

Deep cleaning

- 高压水枪
- 清洗后用出风机吹干,每60天进行·
- 地毯清洗机 清洗后用出风机吹干,每60天进行





对于顽固污渍,可在高压水枪/ 地毯清洗机中配 以中性清洁剂进行清洗。










星雅是兼具刮沙除尘吸水综合功能的地垫产品,尼龙单丝和复丝混合纱线,性能和寿命优越,适用于通道和室内门径区域。 The best integrated features at removing the maximum dirt particles and moisture absorption, Polyamide 66 - mono & multi filaments, excellent performance and life, especially suitable for atrium areas and indoor entrances.

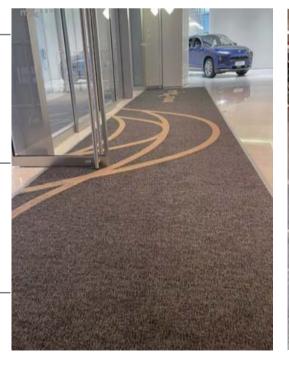








容尘率实验对比,星雅更易于藏纳尘土颗粒 Comparison chart of dust holding rate experiment, Foris is easier to hold dust particles







适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, aparents, and other types of entrances.

清洁维护 Cleaning

建议每日用吸尘器清洁,定期采用低泡清洗,清洗水温不超过60°C。 Using vacuum daily cleaning, Periodic cleaning by injection/extraction. Water temperature should not exceed 60°C.

颜色 Available Color







勃艮第红 Dark red



金峰石棕 Brown

环保材质,可再生 Eco-friendly material, renewable





采用环保材料Econyl可再生尼龙,从全球各地的海洋织 网、尼龙物中提取材料,经过六道再生循环出品。 The top environmentally friendly material Econyl renewable nylon is used, and the material is extracted from marine netting and nylon around the world. After six recycling cycles.



环保材料视频

技术参数 Technical Specification


技不参数 Technica	il Specification			
纱线类型 Yarn Type	尼龙单丝和复丝纤维 Nylon-Mono & Multi Filaments			
纱线类型 Yarn Construction	高捻度和热定型处理的单丝和复丝混合构成 High Twist and Heat Set combination of mono & multi filaments			
绒重 Textile Weight	约1100克/平方米 Approx.1100 g/m²			
绒高 Textile Height	7.5mm			
背衬类型 Backing Type	PVC背衬材料(2mm厚 PVC backing (2mm thi			
厚度 Total Thickness	约10毫米 Approx.10mm			
重量 Total Weight	约3.6公斤/ 平方米 Approx.3.6 kg/m²			
尺寸 Size	200x2500cm			
毯面印染技术 Textile Dyeing	喷印印染 Printing Dyeing			
毯面色牢度 Textile Light Fastness	气冷氙灯老化检测 ISO 105-B01:fS色牢度 > 6 Xenotest ISO 105-B01:>6 on blue scale			
抗静电性能 Antistatic Behaviour	Approx.1012ohms(ISO 10965)			
传热阻力 Heat Transmission	IS083020.113M2.K/W (SUITABLE FOR HEATED FLOOR)			
耐磨性 Wear Resistanee	EN 1307 Class 32			
防滑性能 Slip Resistance	EN 13893 DS(0.60) 产地 美国 Place Of Origin U.S.A.			
阻燃等级 Fire Resistance	GB8624-2012,B1	人流量 Footfall	≥5000	

吸水吸油





特殊的菠萝纹路,纹路清晰,质感硬实,不易踩塌,可快速去除砂砾,让您的通道大门更洁净。 Spacial texture like pineapple, which is clear and firm, not easy to be trampled flatten and quickly remove grit and make your access cleaner.

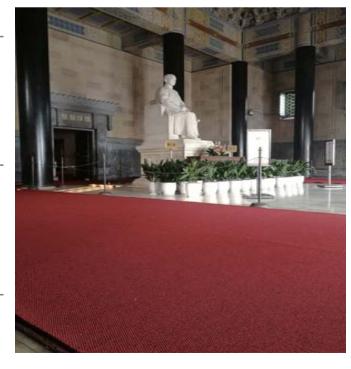





浅灰色 Light grey 深灰色 Dark grey







棕色 Brown

护





外观对比 Appearance comparison

① 绒重对比: 比市面同类产品重 Akon is heavier than similar products in the market





③ 颗粒对比: 更饱满,用料扎实,硬挺不松软,不含胶,遇水更防滑 Plump, solid material, stiff but not soft, no glue, more slippery when exposed to water





② 绒高对比:比市面同类产品高 Akon is higher than similar products in the market





④ 颗粒排列:排列密实,不易被踩踏 Arranged densely, not easy to be stepped on





清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视人流情况加快或降低频率)Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店、商场、写字楼、机场、公寓等各类出入口。

Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

技术参数 Technical Specification

材质 Material	高强度原液印染丙纶纤维 Strong Solution-Dyed PP	绒高 Textile Height	9mm
背底 Backing	PVC	产品总高 Total Height	11mm
幅宽 Width	2m	阻燃性 Fire Retardant	EN ISO 13501:Dfl-s1
卷长 Roll Length	23m	产地 Place Of Origin	荷兰 Netherland
绒重 Textile Weight	1700g/m²	人流量 Footfall	≥5000
产品重量 Total Weight	4000g/m²		

PNNLER



欧洲受欢迎的地垫,刮沙吸水综合能力强,脚感厚实,让您体验尊贵。

超厚脚感

抗静电

Popular high-end floor mats in Europe, with strong scraping and water absorption capabilities, providing a thick and luxurious feel for an exquisite experience.


脚感厚实, 体验感强,不易塌陷 Comfortable and won's be trampled flatten

抗紫外线







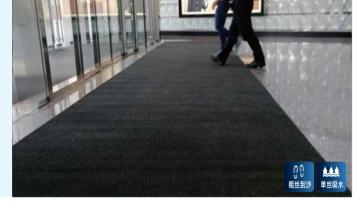

技术参数 Technical Specification

	纱钱类型 Yarn Type	抗静电尼龙66纤维 Antistatic Nylon 66 Fiber	毯面色牢度 Yarn Color Fastness	ISO105-B02: >5
_	纱线结构 Yarn Construction	热定型处理簇状截绒开放式结构 Heat Set Tufted Cut Pile Opened Construction	毯面印染技术 Dyeing Technology	喷印印染 Printing Dyeing
	绒高 Textile Height	8mm	总高 Total Height	10mm
	绒重 Textile Weight	1100g/m²	重量 Total Weight	3410g/m²
	背衬类型 Backing Type	抗紫外线PVC背底(2mm厚度) Anti-UV PVC Backing(2mm thickness)	尺寸 Size	2mx 25m
	耐磨性 Durable	Vetterman Drum Test 66,000 Cycles	产地 Place of Origin	欧洲 Europe
	适用场所 Suitable Area	室外雨棚下或室内 Outdoor Under The Awning Or Indoor	人流量 Footfall	≥5000
	阻燃等级 Flammability	Bfl-s1		

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用 高压水枪配低泡地毯清洁剂清洗,最后用清水反复过清后用吸水机吸 干水,清洗好后最好用干风机把它吹干(视人流情况加快或降低频率) Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店、商场、写字楼、机场、公寓等各类出

入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color



Dark grey



Brown





刮沙除尘吸水综合性能集具的一款地垫,宽条纹外观设计,时尚美观,深受酒店、写字楼、商场物业的青睐。 Oliva is popular in high class hotel, commercial building and shopping mall because of its special striped design and the function of superior dust collection and water absorption.

00 144



技术参数 Technical Specification

技术参数 Technical Specification			
纱线类型	抗静电尼龙纤维		
Yarn Type	Antistatic Nylon Fiber		
纱线结构	热定型处理簇绒状截绒开放式结构		
Yarn Construction	Heat Set Tufted Cut Pile Opened CoNstruction		
绒重	约825克/平方米		
Textile Weight	Approx.825 g/m²		
绒高 Textile Height	6mm		
背衬类型	抗紫外PVC背底 (2 mm厚度)		
Backing Type	Anti-UV PVC Backing(2mm Thickness)		
总高 Total Height	8mm		
重量 Total Weight	3525g/m²		
尺寸 Size	2mx20m		
毯面印染技术	原液染色		
Textile Dyeing Technology	Solution Dyed		
光照色牢度 Light Fastness	ISO 105-B02: >6		
适用场所	室外雨棚下或室内		
Suitable Area	Outdoor Under The Awning Or Indoor		
耐磨性	通过6600次耐磨测试		
Wear Resistance	Vetterman Drum Test 66,000 Cycles		
阻燃等级 Flammability	Cfl-s1		
产地	欧洲		
Place Of Origin	Europe		
人流量 Footfall	≥5000		

清洁维护 Cleaning

建议每日用吸尘器清洁,定期采用低泡清洗,清洗水温不超过60℃。 Using vacuum daily cleaning, Periodic cleaning by injection/extraction. Water temperature should not exceed 60℃.

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各类出入口。

Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color





Red



色 ock

吸 水吸 油

· 染





深受亚洲市场欢迎的综合刮沙吸水除尘地垫,条纹外观设计,软硬丝相结合,具有刮沙吸水除尘功能,深受酒店、写字楼、商场物业青睐。 The comprehensive scraping, water-absorbing, and dust-removing mat is highly popular in the Asian market. It features a unique striped appearance design, combining soft and hard bristles, and possesses powerful functions of sand scraping, water absorption, and dust removal. It is highly favored by upscale hotels, office buildings, and shopping mall properties.

技术参数 Technical Specification

纱线材质 Yarn Material	尼龙纤维 Polyamide
纱线结构 Yarn construction	高捻度热定型处理的单丝和复丝的排列机构 Tufted in cut pile row construction
背衬类型 Backing type	PVC
绒高 Textile height	7mm
绒重 Textile weight	800g/m²
总重量 Total weight	3.7kg/m²
尺寸 Size	1.8m×18m/roll
印染技术 Dyeing Technology	原液染色 Solution-Dyed Yarn
毯面色牢度 Textile light fastness	气冷氙灯老化检测 ISO 105-B01: 色牢度>6 Xenotest ISO 105-B01: >6 on blue scale

清洁维护 Cleaning

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,通道 等各类出入口。

Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, corridors, and other types of entrances.

适用区域 Suitable Area

建议每日用吸尘器清洁,定期采用低泡清洗,清洗水温不超过60℃。 Using vacuum daily cleaning, Periodic cleaning by injection/extraction. Water temperature should not exceed 60C.,

Red

颜色 Available Color




Grey







Brown

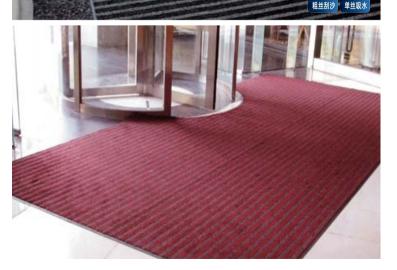

111

疲劳





欧洲潮流刮沙地垫,设计风格时尚,适用于高人流量的通道和门径区域。单丝复丝结合,刮擦能力强,外观稳重大气,既能接受高 人流的考验,又能永葆美观。

European trendy scraper mat with a fashionable design, suitable for high-traffic corridors and entrance areas. The combination of single and double threads provides strong scraping capability, while the appearance remains elegant and stable. It is the most popular design that not only withstands high foot traffic but also maintains its aesthetic appeal.

阳光下毯面"光彩夺目"

Under the sunlight, the surface is sparks like stars





简约时尚 除尘力强 Simple fashion strong dust removal ability

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清洁 剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视人流情 况加快或降低频率)。

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Deep Cleaning: Monthly use carpet pumping washing machine with low foamcarpet cleaning agents. Also can use water gun with low foam carpet cleaner toclean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店、商场、写字楼、机场、公寓等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color








棕色 Brown




技术参数 Technical Specification

技术多数 Technical Specification			
纱线类型 Yarn Type	抗静电尼龙纤维 Antistatic Nylon Fiber		
纱线结构 Yarn Construction	热定型处理簇绒状截绒开放式结构 Heat Set tufted cut pile opended	comstruction	
绒重 Textile Weight	约850克/平方米 Approx.850 g/m²		
绒高 Textile Height	7.5mm		
背衬类型 Backing Type	抗紫外PVC背底(2 mm厚度) Anti-UV PVC Backing(2mm Thickness)		
总高 Total Height	9mm		
重量 Total Weight	3650g/m²		
尺寸 Size	2mx20m		
毯面印染技术 Textile Dyeing Technology	原液染色 Solution Dyeing		
光照色牢度 Light Fastness	ISO 105-B02: >6	阻燃等级 Flammability	Cfl-s1
适用场所 Suitable Area	室外雨棚下或室内 Outdoor Under The Awning Or Indoor	产地 Place Of Origin	欧洲 Europe
耐磨性 Wear Resistance	通过6600次耐磨测试 Vetterman Drum Test 66,000 Cycles	人流量 Footfall	≥5000





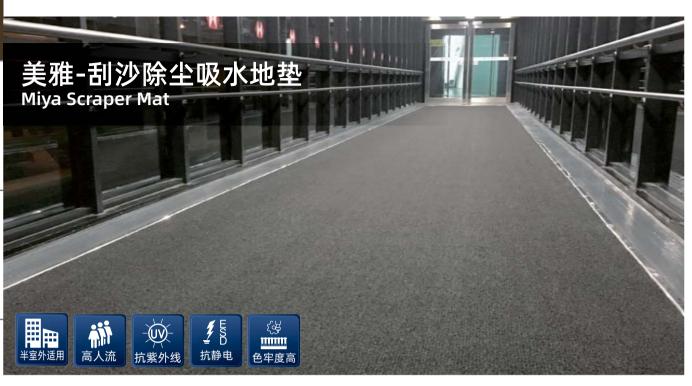


美雅吸水吸尘性能好,耐磨且回弹性高;不褪色,外观持久不变;是各个行业地面防滑去污的理想选择。

Miya mat with good water and dust absorption performance, which is wear-resistant and high resilience. Its fading resistant with a long-lasting appearance, which is an ideal choice for anti-slip and stain removal of floors.

圈绒结构,回弹性好,不易踩塌

Loop pile structure with good resilience and won't be trampled flatten









技术参数 Technical Specification

纱线类型 Yarn Type	抗静电尼龙纤维 Antistatic nylon fiber		
纱线结构 Yarn Construction	单丝复丝圈绒混纺 Loop pile combination of momo	& multi filamen	ts
绒重 Textile Weight	700g/m²		
绒高 Textile Height	5.5mm		
背衬类型 Backing Type	抗紫外PVC背底(2 mm厚度) Anti-UV pvc backing(2mm Thick	ness)	
总高 Total Height	7mm		
重量 Total Weight	3600g/m²		
尺寸 Size	2mx20m		
毯面印染技术 Textile Dyeing Technology	原液染色 Solution dyed		
光照色牢度 Light fastness	ISO 105-B02: >6		
适用场所 Suitable Area	室外雨棚下或室内 Outdoor under the awning or indoor	阻燃等级 Flammability	GB8624-2012:B1
耐磨性 Wear Resistance	Vetterman drum test 66,000 cycles	人流量 Footfall	≥5000

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清洁剂 清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视人流情况 加快或降低频率)。

Daily Cleaning: Daily clean with an upright roller vacuum cleaner.

Deep Cleaning: Monthly use carpet pumping washing machine with low foamcarpet cleaning agents. Also can use water gun with low foam carpet cleaner toclean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店、商场、写字楼、机场、公寓等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color







深灰色 Dark grey

Blue

Red






欧洲潮流刮沙除尘吸水地垫,色彩低调高雅,性能出众,适用于商业环境。

It is a European trend scrape dust absorbent mats with color low-key luxury but high performance, suitable for high-end commercial environment entrance.

毯面纹理高端,适用于高雅场景 High-end carpet texture, first choice for luxury scenes







技术参数 Technical Specification

1人大学数 Technical Specification		
纱线类型 Yarn Type	抗静电尼龙纤维 Antistatic Nylon Fiber	
纱线结构 Yarn Construction	热定型处理簇状截绒开放式结构 Heat set tufted cut pile opended comstruction	
绒重 Textile Weight	975克/平方米	
绒高 Textile Height	7mm	
背衬类型 Backing Type	抗紫外PVC背底 (2 mm厚度) Anti-UV PVC Backing(2mm Thickness)	
总高 Total Height	9mm	
重量 Total Weight	3560g/m²	
尺寸 Size	2mx25m	
边宽 Border Width	2.5cm	
毯面印染技术 Textile Dyeing Technology	喷印印染 Printing Dyeing	
毯面色牢度 Yarn Color Fastness	ISO105-B02: >5	
适用场所 Suitable Area	室外雨棚下或室内 Outdoor Under The Awning Or Indoor	
耐磨性 Wear Resistance	Vetterman Drum Test 66,000 Cycles	
阻燃等级 Flammability	EN ISO 13501 Cfl-s1	
产地 Place Of Origin	欧洲 Europe	
人流量 Footfall	≥5000	

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁。

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视人流情况加快或降低频率)。 Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各类出入口。

Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

抗 疲





欧洲潮流刮沙地垫,设计风格时尚,适用于高人流量的通道和门径区域。单丝复丝结合,刮擦能力强,外观稳重大器,深受欢迎的设 计, 既能接受高人流的考验, 又能永葆美观。

This is a European trend scraping mats with design style fashion, which applies to entrance to high-traffic area. This products using monofilament multifilament combination of strong scratch capability, while the product is a world-class design, the appearance of stable amplifier.

欧洲潮流,毯面设计风格时尚,总高8mm,不卡门 Fashion style with total height 8mm, which can be open the door freely





技术参数 Technical Specification

技术多数 Technical Specification			
纱线类型 Yarn Type	抗静电尼龙纤维 Antistatic Nylon Fiber		
纱线结构 Yarn Construction	热定型处理簇状截绒开放式结构 Heat set tufted cut pile opended comstruction		
绒重 Textile weight	800g/m²		
绒高 Textile Height	6mm		
背衬类型 Backing Type	抗紫外PVC背底 (2 mm厚度) Anti-UV PVC Backing(2mm Thickness)		
总高 Total Height	8mm		
重量 Total Weight	3200g/m²		
尺寸 Size	2mx25m		
边宽 Border Width	2.5cm		
毯面色牢度 Yarn Color Fastness	ISO 105-B02: >5		
毯面印染技术 Textile Dyeing Technology	喷印印染 Printing Dyeing		
适用场所 Suitable Area	室外雨棚下或室内 Outdoor Under The Awning Or Indoor		
耐磨性 Wear Resistance	Vetterman Drum Test 66,000 Cycles		
阻燃等级 Flammability	Bfl-s1		
产地 Place Of Origin	欧洲 Europe		
人流量 Footfall	2500-5000		



清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯 清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干 (视人流情况加快或降低频率)

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet

cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各类出入口。 Suitable used the entrance of hotel, shopping mall, office building, airport, apartment, etc.,

颜色 Available Color



Grey




棕色条纹 Brown stripes

疲 劳

护



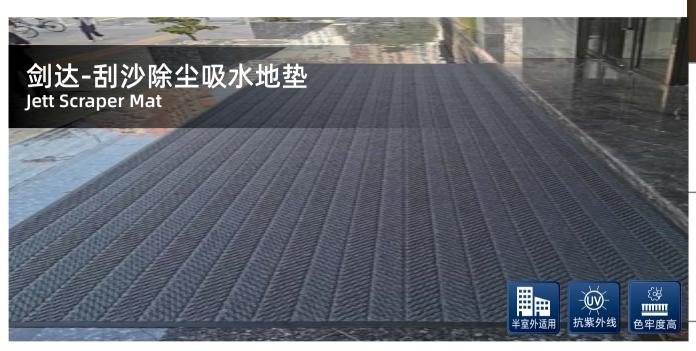

轮胎纹立体表面纹理,安全防滑,立体感强,整洁稳重,主要用于出入口刮沙除尘,可长期户外阳光下铺设使用,抗紫外线。 The unique tire surface texture is safe, anti-slip, strong in three-dimensional sense, neat and tidy. It is mainly used for sanding and dust removal at the entrance and exit. It can be used for long-term outdoor sunlight and UV protection.

大颗粒尘土刮沙能力强,更适合北方 Strong sand scraping ability, suitable for northern



立体的纹路设计,强力的刮沙除尘效果 Three-dimensional texture design, powerful sand scraping and dust removal effect

纹路骨架支撑,回弹力强



可镶嵌**logo** Inlaid logo available





适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店、商场、写字楼、机场、公寓等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color



Grev



深灰色 Dark grey



红色 Ded

技术参数 Technical Specification

	-		
纱线类型 Yarn Type	耐磨合成纤维 Wear Resistant Synthetic Fiber	尺寸 Size	2.05mx20m
纱线结构 Yarn Construction	针刺绒头毯面 Needled Pile Carpet	毯面印染技术 Textile Dyeing Technology	原液染色 Solution Dyeing
绒重 Textile weight	1000 g/m²	光照色牢度 Light fastness	ISO 105-B02: >6
绒高 Textile Height	7mm	阻燃等级 Flammability	GB8626-2012: B1
背衬类型 Backing Type	PVC	产地 Place Of Origin	中国 China
总高 Total Height	9mm	人流量 Footfall	≥5000
重量 Total Weight	4000g/m²		

清洁维护 Cleaning


日常清洁:每日用直立式滚轮吸尘器清洁;

日市捐任。每日可用业场投水板工部捐捐, 深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清 洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视

人流情况加快或降低频率)

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).



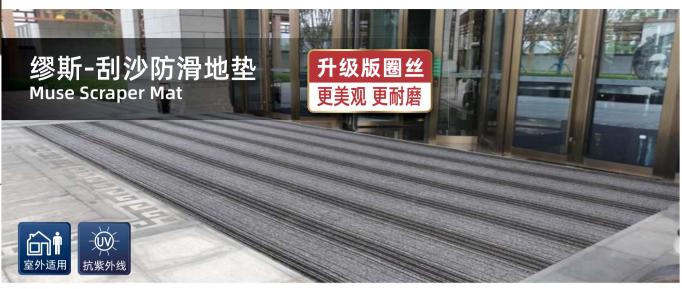

硬圈丝毯面材质,防滑性能极佳,刮沙能力强,可长期户外铺设使用,防紫外线,经久不褪色.可刮除灰尘,砂砾和鞋底水份,让您的通 道更清洁,更安全,更美观。

Unique carpet surface material, excellent anti-slip performance, strong sand scraping ability, can be used for long-term outdoor laying, anti-ultraviolet, durable color. Scrape away dust, grit and moisture from soles, making your passages cleaner, safer and better looking.

特殊结构设计,强力耐磨不断裂 Special structural design, strong wear-resisting and non-breaking



毯面采用 PVC 包覆高强度PET材质,特殊处理,强力耐磨、持久弹性,持久

The blanket surface is made of PVC coated with high strength PET material, with special treatment, strong wear resistance, durable elasticity and durability.

耐高温抗严寒,可长期户外铺设使用

High temperature and cold resistance, which can be laid outdoors for a long time



簇状圈绒结构, 刮沙防滑, 雨水情况下仍具优良防滑性能, 色牢度高, 室 外铺设可抗紫外线, 持久不褪色, 可在各种地域、天气下使用。 Tufted ring structure, sand blowing anti-slip, rain still has excellent anti-slip performance, high color fastness, outdoor laying can resist ultraviolet, durable, can be used in all kinds of regions, weather.

技术参数 Technical Specification

٥.	12/1/2 x recimical specimenton					
	纱线类型 Carpet Materia	PVC包覆高强度PET PVC-coated high-strength PET				
Ī	毯面结构 Carpet Construction	簇状圈绒 Tufted Loop Fleece				
	产品重量 Total Weight	4200g/m²				
	产品高度 Total Height	9mm				
	背衬类型 Backing	抗紫外PVC背底				
-	毯面印染技术 Dyeing Technology	原液染色 Printing Dyeing				
	毯面色牢度 Yarn colour fastness	ISO 105-B02: >5				
Ī	阻燃等级 Flammability	GB8624-2012: B1				

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,公寓等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, apartments, and other types of entrances.

颜色 Available Color







银灰色 Silver gray



清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁。

深度清洁:每月可用地毯抽吸机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地 毯清洁剂清洗,最后用清水反复过清后用吸水机吸干,清洗好后最好用干风机把它吹

干 (视人流情况加快或降低频率)

Daily cleaning: Daily cleaning with an upright roller vacuum.

Deep cleaning: Monthly cleaning with a carpet extractor and low-foaming carpet cleaner. It can also be cleaned with a high-pressure water gun and a low-foaming carpet cleaner. Finally, it is repeatedly cleaned with water and then dried with a water absorber. After cleaning, it is best to dry it with a dry fan (speed up or reduce the frequency depending on the flow of people)





表面的丝状布置非常严密,能有效吸附灰层和脏物,并且还具有很好的防水防污的能力,材质柔软有韧性,也不会产生折痕,并且对于高 强度的磨损和撕裂完全没影响, 经久耐用。

The filamentous arrangement of the surface is very strict, can effectively adsorb ash layer and dirt, and also has a good waterproof and anti-fouling ability, the material is soft and ductile, will not produce creases, and has no impact on high-strength wear and tear, durable.

毯面厚12mm,丝圈强韧不易折断 Thickness 12mm,Strong and not easy to break



牛筋底,使用寿命更长 Tendon bottom, longer service life



含UV新料,长时间使用不易褪色 New material with UV, not easy to fade after long-term use



定制Logo,两种工<u>艺可选</u> **Custom logo**





烫金 Logo

喷印 Logo

颜色 Available Color



Grey





Red



技术参数 Technical Specification

背底 Backing	PVC	宽幅 Width	1.2m
厚度 Thickness	12mm	卷长 Roll Length	15m
重量 Weight	4kg/m²	阻燃 Flame retardant	GB 8624 B1

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁。

深度清洁: 定期采用低泡洗涤剂清洗,清洗水温不超过60℃。
Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Deep Cleaning : Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Water temperature should not exceed 60°C.

适用区域 Suitable Area

适用于各种商业环境及高人流量区域,如酒店,商场,写字楼,机场,通道等各类出入口。 Suitable for various commercial environments and high-traffic areas, such as hotels, shopping malls, office buildings, airports, corridors, and other types of entrances.

派勒·好地垫·好地面



派勒椰衣地垫,选用天然植物纤维原料,毯面纱线纯手工捻制而成;产品结实耐用,脚感厚实,功能强大,是一款难得的结合环保理念与 实用功能为一体的地垫产品。

Coco Mat use superior natural coconut fiber, textile pile is twisted by pure hand. Coco mat is always the priority to the environment protecting lovers. This mat is strong and durable, thick and wonderful feet feeling, and extraordinary functional, which is a mat combines the ideas of green and useful.

厚度高达17毫米,耐用不塌陷 Durable and wont' be trampled flatten





椰衣原料,全手工捻制而成 Natural coconut coat raw materials





可异形, 可喷印, 搭配井坑使用效果更佳 Can be shaped and spray-printed, which better used in well pit

Natural Shredded Coconut Hand Twisted

技术参数 Technical Specification

材质	椰衣纤维	产品总高	17mm
Material	Handspun	Total Height	
背底	PVC	耐磨性	通过EN ISO1307测试
Backing		Wearing Class	EN ISO1307
幅宽 Width	2m	环保标准 Environmental Standard	VDA275、VDA277
卷长	12.5m	产地	荷兰
Roll Length		Place Of Origin	Netherland
产品重量 Total weight	8300g/m²	人流量 Footfall	2500-5000
绒高 Textile Height	13mm		

清洁维护 Cleaning

日常清洁:将椰棕地垫翻过来拍打地垫背底,以将藏匿在地垫里的灰尘和沙子及其他颗粒 垃圾清空。

深度清洁:使用水枪对地垫毯面冲洗,再将翻过来将地垫毯面向下,以使深处的灰尘和沙 子能随水流出。将地垫彻底晾干,可放在通风的地方或用鼓风机加速风干,

Daily Cleaning: Turn the coconut palm mat over and tap the back of the mat to remove the dust, sand and other particulate garbage hidden in the mat. Deep Cleaning: Rinse the surface of the carpet with a water gun, then turn it over and turn

the carpet down, so that the deep dust and sand can flow out with the water. Dry the floor mat thoroughly and place it in a ventilated place or use a blower to speed up the air-drying.

适用区域 Suitable Area

适用于酒店,商场,写字楼,工厂,学校等各种出入口的除尘,特别适用于各种形象店, 概念性建筑设计的入口除尘。

Suitable for various entrances in hotels, shopping malls, office buildings, factories, schools, and other establishments, this product is especially suitable for dust removal at entrances of image stores and conceptually designed buildings.



颜色 Available Color





Bordeaux






深棕色 Dark brown

黑色 Black

39

配


件及维

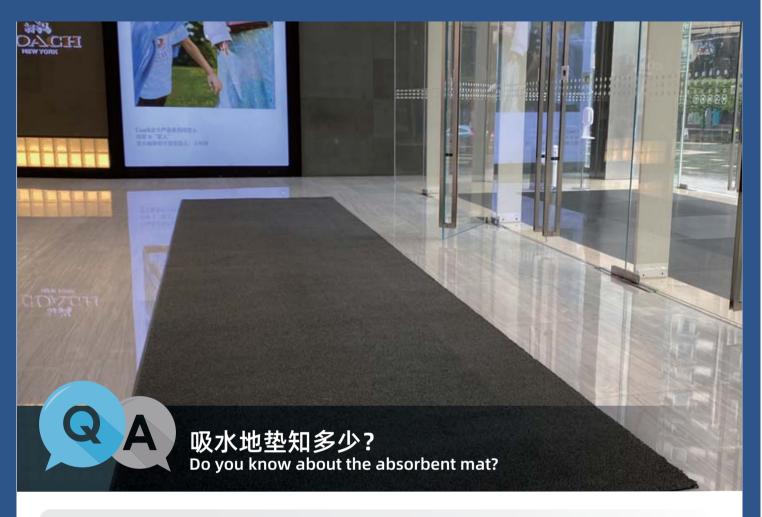

01 吸水 "三步走"的原理 The principle of water absorption "three steps" 专业的吸水地垫需要满足"三步走"原理,即普通成年人走三步的距离,可以清

除鞋底的泥水、污渍。 Professional absorbent floor mats need to meet the "three-step" principle, that is an average adult walks three steps to remove muddy water and stains on the sole.







双条纹吸水性能差,走三步后鞋底仍旧潮湿 艾美增强型吸水性能极强,三步走后无脚印

02 吸水地垫材料怎么选? How to choose absorbent mat material?

常年铺设推荐

尼龙 nylon



刮沙除尘+吸水吸油 Scraping sand and dust absorb water and oil

尼龙材料的耐磨型、韧性都相对较好,所以使用寿 命会更长久。尼龙兼具一些吸水性,在室内外铺设都有很好的表现。

雨天专铺推荐

超细纤维 superfine fiber

吸水吸油 Absorb water and oil

超细纤维材料, 专用于吸水防滑地垫类使 用,吸水性能是棉质的两倍,可以吸收不 反流.

小TIPS: 超细纤维吸水性为什么那么强? Why is the water absorption of microfiber so strong?

超细纤维可以吸附自身重量7倍的灰尘、颗 粒、液体、每根细丝只有头发的1/200. 这就是超细纤维具有超强清洁能力的原因。



Microfiber can absorb up to 7 times its own weight in dust, particles and liquids. Each filament is only 1/200 the size of a hair. That's why microfiber has super cleaning power.

03 背底材料怎么选? How to choose the backing material?

橡胶地垫是吸水地垫中使用相对更好一些的,柔软有韧性,可以 用工业洗衣机清洗。

Rubber floor mats are relatively better used in absorbent floor mats are soft and tough, and can be washed with industrial washing machines.

使用推荐: 具有油污、寒冷室外, 推荐使用丁腈橡胶背底; 需要经常清洗、片材使 用,推荐使用橡胶背底;通常情况下PVC背底均已可适用;

Recommended to use nitrile rubber backing for oily dirt and cold outdoors, and rubber backing is recommended if it needs to be cleaned frequently. Generally, PVC back and bottom are applicable.

Ч		耐油污 Oil-resistant	耐磨 Wear-resistant	耐温抗寒 Heat & cold resistant	柔韧性 Flexibility	抗老化 Anti-aging	贴地性 Grounding	工业洗衣机清洗 Industrial washing machine cleaning	稳定性 Stability
	pvc背底 pvc backing	•	•	•	•	•	•	NO	
	普通橡胶背底 Ordinary rubber back	•	•	•	•	•	•	NO	•
	100%丁腈橡胶背底 Nitrile rubber backing	•	•	•	•	•	•	YES	•







福雅吸水控尘尼龙地垫,适用于各类地面,用于吸附细尘,安全防滑,吸水控油,是一款经久耐用的地垫。 Forever absorb water and dust-controlling nylon floor mat, suitable for all kinds of floors, used to absorb fine dust, safe and anti-slip, water-absorbing and oil-controlling, is a durable floor mat.





吸 水

PNNLER 派勒·好地垫·好地面

尼龙,更轻薄,更吸水 Nylon, light and absorbent







颜色 Available Color



红黑色 Reddish black



前卫灰 Frontier grey



棕色 Brown

丁腈橡胶背底更防滑,更耐油,更耐寒,更耐用 Nitrile rubber backing is more anti-slip, oil-resistant, cold-resistant and durable





丁腈橡胶,耐油耐用 Oil resistant and durable



钉底抓地力更佳 Better grip at the bottom of the nail

颜色持久,反复洗涤不褪色 Long-lasting color, no fading after repeated washing



洗涤五次效果 5 washings

洗涤二十次效果

20 washings

同行企业尼龙6纤维 Competitor's nylon 6 fiber



洗涤五次效果 5 washings



洗涤二十次效果 20 washings

技术参数 Technical Specification

毯面材质 Blanket Material	尼龙66,原液染色 Nylon66,Solution-Dyed Yarn		
绒高 Textile Height	10mm		
绒重 Textile weight	780g/m²		
尺寸 Size	1.5m×18m/roll		
背底类型 Backing Type	丁腈橡胶,防滑平底/钉底 Nitrile Rubber,Flat/gripper		
橡胶边厚 Height	1.5mm		
抗电性 Electrical Behaviour	抗静电 Static Disipative		
抗紫外线 UV Resistance	通过ISO 105-B02测试 ISO 105-B02 Test		
阻燃 Fire Resistance	GB8624-2012:B2		
长霉等级 Fungi-Growth Grade	GB/T2423.16-2008:0级		
环保标准 Environmental Standard	ZEK 01.4-08:(pahs)等级3		
产地 Place of Origin	中国 China		
人流量 Footfall	≥5000		

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地 毯清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后用干风机把它吹干 (视人流情况加快或降低频率)

Deap Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning. agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于雨天室内大门内侧、通道、洗手间、厨房等出入口等油污水分较多的区域。 Suitable for areas with higher oil and water contamination, such as the indoor side of main doors, hallways, restrooms, kitchens, and other entrance areas, especially during rainy weather.





吸水吸油类地垫,特制纱线毯面,具有很强的吸油吸水性能,特殊防滑背底材质,安全防滑耐用,适用于门厅内侧或湿滑油污区域。 Special fibers ensuring superior water, oil and grease absorption properties. The best choice for the indoor entrance area and wet and oily area.

毯面轻薄,背底强韧,厚度适中,不卡门 The mat is light and thin which can be open the door freely



技术参数 Technical Specification

毯面材质 Blanket Material	超细纤维 Micro Fibers	产品重量 Total Weight	3850g/m²
背底 Backing	PVC	绒高 Textile Height	6mm
幅宽 Width	2m	产品总高 Total Height	8mm
卷长 Roll Length	25m	阻燃性 Flamability	GB8624-2012:B1
是否可定制尺寸 Available For Custom Size	是 Yes	产地 Place of Origin	荷兰 Netherland
绒重 Textile Weight	800g/m²	人流量 Footfall	2500-5000

颜色 Available Color







棕色 Brown



清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水 枪配低泡地毯清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗 好后最好用干风机把它吹干(视人流情况加快或降低频率)

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于雨天室内大门内侧,通道,洗手间,厨房出入口等油污水份较多区域。 Suitable for areas with heavy oil and water pollution, such as the interior side of doors, corridors, restrooms, kitchen entrances, etc., during rainy days.

护






加厚的超细纤维材质,具有更强的吸水吸油性能,特殊防滑背底材质,安全防滑耐用,适用于门厅内侧或湿滑油污区域。
The thickened microfiber material has stronger water and oil absorption properties, and the special anti-slip backing material is safe, anti-slip and durable, and is suitable for the inside of the hall or wet, slippery and oily areas.

超细纤维吸水力强,吸水能力强一倍 The microfiber materials with twice water absorption capacity than others



艾美超细纤维每平方米是同类产品吸水的1倍 Absorpa microfiber absorbs twice as much water per square meter as similar products.

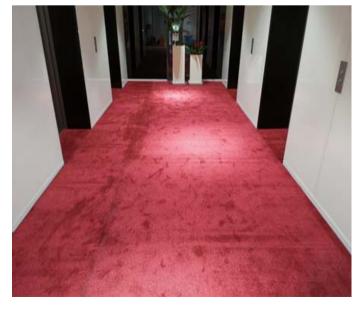

技术参数 Technical Specification

型号 Type	A2型	C5型	D4型	材质 Material	超细纤维 Microfiber
产品重量 Total Weight	4850g/m²	3100g/m²	4600g/m²	背底 Backing	PVC
绒重 Textile Weight	1030g/m²	860g/m²	1050g/m²	幅宽 Width	2m
绒高 Textile Height	9mm	8mm	7mm	卷长 Roll Length	18m
产品总高 Total Height	11mm	10mm	9mm	产地 Place Of Origin	中国 China
阻燃性 Flamability	GB8624-20	12:B ₁		人流量 Footfall	2500-5000

清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干(视人流情况加快或降低频率) Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning.

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).

适用区域 Suitable Area

适用于雨天室内大门内侧,通道,洗手间,厨房出入口等油污水份较多区域。 Suitable for areas with high oil and water pollution, such as the interior side of doors, corridors, restrooms, kitchen entrances, etc., especially during rainy days.

颜色 Available Color



A2型 灰色 Grey



C5型 灰色 Grey



D4型 红黑色 Red





丽豪/富豪贵宾地垫,精选庄重贵宾红,典雅正气,热烈高贵。鲜艳明亮,永不退色,脚感厚实,专业防滑背衬,安全防滑有保障。 The mat is elegant and pure, warm and noble. Never fade with comfortable foot feel. The unique Nitrite rubber backing is anti-slip and safety, which is first choice for high class VIP.

正红鲜亮,彰显高贵 Bright colors, show nobility







富豪尼龙材质,色牢度很高,不易褪色 Fortune™ high fastness, not easy to fade





技术参数 Technical Specifications

X/1/5 X recimical specifications					
产品名称 Product Name	丽豪 Lovely	富豪 Fortune			
毯面材质 Blanket Material	PP	尼龙 Nylon			
背底 Backing	PVC	PVC			
绒重 Textile Weight	900g/m²	1360g/m²			
总重量 Total Weight	4200g/m²	4800g/m²			
幅宽 Width	2m	2m			
卷长 Roll Length	18m	18m			
绒高 Textile Height	8mm	11mm			
产品总高 Total Height	10mm	13mm			
毯面印染技术 Dyeing Technology	原液染色 Printing Dyeing	原液染色 Printing Dyeing			
抗电性 Volta Effect	抗静电 Static Disipative	抗静电 Static Disipative			
产地 Place Of Origin	中国 China	中国 China			
人流量 Footfall	2500-5000	≥5000			

适用区域 Suitable Area

适用于各类宴会迎宾场合,烘托热烈气氛,尽显高档尊贵的氛围。 Suitable for all kinds of banquet and reception occasions, creating a warm and lively atmosphere while exuding a sense of high-end luxury.



清洁维护 Cleaning

日常清洁:每日用直立式滚轮吸尘器清洁;

深度清洁:每月可用地毯抽洗机配低泡地毯清洁剂清洗。也可以用高压水枪配低泡地毯 清洁剂清洗,最后用清水反复过清后用吸水机吸干水,清洗好后最好用干风机把它吹干

(视人流情况加快或降低频率)

Daily Cleaning: Daily with upright vacuum cleaner with a brush cleaning. Deep Cleaning: Monthly use carpet pumping washing machine with low foam carpet cleaning agents. Also can use water gun with low foam carpet cleaner to clean, and finally repeatedly washed with water after dry water suction machine, (depending on traffic situation, accelerate or reduce frequency).





研究发现,鞋底是病毒传播的新途径。且科学家曾在医护人员鞋底上发现数不胜数的病毒。据此,专家强烈建议需要进行鞋底消毒, 否则这些病毒会依附于鞋底,潜伏在你身边。

The study found that shoe soles are a new way for the virus to spread. And scientists have found countless viruses on the soles of medical staff's shoes. Based on this, experts strongly recommend that shoe soles need to be disinfected, otherwise these viruses will attach to the soles and lurk around you.

第一步

消毒区 Disinfection area

鞋底消毒 Shoes soles disinfection











第二步

吸水区 Absorbent area

吸收鞋底的除菌消毒液 不将水渍残留带入室内 Absorb shoes soles disinfectant













派勒将地垫印染技术应用到广告概念定制地垫领域,能更大程度上还原展现复杂的图案及色彩,在地垫上实现您的设计梦想,主导您的企 业形象和品牌文化在客户心中留下比较深刻的形象。 We apply our floor mat printing and dyeing technology to the field of concept advertising customized floor mats, allowing for a high degree of fidelity in

reproducing complex patterns and colors. We can bring your design dreams to life on floor mats, leading your company's image and brand culture to leave a profound impression in the minds of your customers.

































吸



可以定制的LOGO形式? Which form of LOGO can be customized?

派勒具有独立的商业设计部门,可以及时响应定制设计需求。

Paaler has an independent commercial design department that can respond to custom design needs in a timely manner.

① 镶嵌LOGO Inlaid LOGO

将不同颜色和材质的毯面用镶嵌工艺粘合,LOGO可以选择各种毯面进行定制,呈现立体、大气的效果。*LOGO的线条粗细不能小于1厘米。

The carpet surfaces of different colors and materials are bonded by the mosaic process, and the LOGO can be customized by selecting various carpet surfaces to present a three-dimensional and atmospheric effect. *The thickness of the lines of the LOGO cannot be less than 1 cm.





② 印染LOGO Printing and dyeing LOGO

可以满足更具有个性的定制要求,呈现丰富的颜色和图案,让你的品牌形象富有创意。 It can meet more personalized customization requirements, present rich colors and patterns, and make your brand image creative.





③ 彩标LOGO/烫金 Color logo/Bronzing

可以选择不同毯面材质和多种颜色组合。

Multiple options of carpet materials and color combinations are available to choose from.





印染地垫设计流程:

Printing and dyeing floor mat design process





设计师根据制作要求出图



THE RITZ CARLTON

双方确认定稿颜色及其他事项













技术参数 Technical Specification

产品名称 Product Name	A <u>型</u>	B型	G型
毯面材质 Blanket Material	尼龙66 Nylon66	尼龙66 Nylon66	合成纤维细丝直纱 Synthetic Filament
背底 Backing	丁腈橡胶 Nitrile Rubber	丁腈橡胶 Nitrile Rubber	丁腈橡胶 Nitrile Rubber
绒重 Textile Weight	950g/m²	600g/m²	1600g/m²
总重量 Total Weight	2900g/m²	2300g/m²	3400g/m²
厚度 Total Thickness	10mm	6mm	11mm =
边宽 Border Width	15mm-20mm	15mm-20mm	15mm-20mm
抗电性 Volta Effect	抗静电 Static Disipative	抗静电 Static Disipative	抗静电 Static Disipative
产地 Place of Origin	美国/中国 U.S.A/China	中国 China	中国 China
人流量 Footfall	2000-5000	2000-5000	2000-5000


清洁维护 Cleaning

建议每日用吸尘器清洁,定期采用低泡清洗,清洗水温不超过60℃。 The recommended cleaning method is to use a vacuum cleaner daily and periodically use

a low-foam cleaning method with a cleaning water temperature not exceeding 60°C.

适用区域 Suitable Area

适用于各种室内区域。

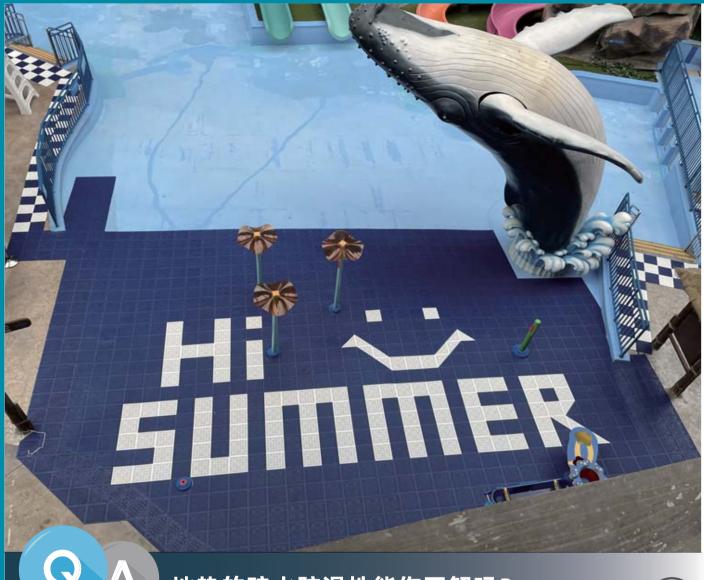

地垫的疏水防滑性能你了解吗? Do you know the drainage and anti-slip floor mat?



01 怎么样的疏水防滑地垫好? What kind of drainage anti-slip floor mat is better?

① 必须具备防滑等级的检测报告。派勒所有疏水防滑地垫均通过"油湿斜坡法"的R10防滑等级,安全可靠。 TIPS:派勒已承保第三者责任险:如由于地垫产品质量问题导致的滑倒受伤,派勒承担主要责任。 ②材料环保性。产品通常在密闭环境中使用,需要无异味、无二次回收料,确认其环保安全。

- ③经久耐用。
- ① It must have the test report of anti-slip grade.
- ② Material environmental protection.
- ③ Durable.













02 哪些场景需要疏水防滑? Which scenarios require the drainage and anti-slip mat?

所有潮湿、有水、有油地面都需要配备防滑地垫,乐园景点、泳池会所、星级酒店,明文规定均需达到地面防滑标准。 All wet, watery, and oily surfaces need to be equipped with anti-slip floor mats. Paradise attractions, swimming pool clubs, and star-rated hotels are expressly required to meet the ground anti-slip standards.

03 公共场所,使用阻燃的地垫更安全! In public places, it is safer to use flame retardant floor mats!

派勒疏水防滑地垫均通过阻燃B1等级,遇火难燃,离火自灭。选择石墨黑系列更具有隐藏脏 污的效果,公共场所更适用!

Paaler's drainage and anti-slip floor mats are all flame retardant with B1 grade and which are not and flammable in case of fire. Choosing the graphite black series has the effect of hiding dirt, and it is more suitable for public places!





B1级阻燃, 遇火难燃, 离火自灭

4年产品依旧如新

04 我该用哪款疏水防滑地垫? Which drainage anti-slip mat should I use?



表面加强防滑颗粒,安全耐脏 With anti slip particles, more safe and dirt resistant



6mm高度立柱,加速水流循环,表面无积水 6mm height column, accelerate water circulation



模块设计实现拼接自由, 且防滑又耐油 Free splicing, anti-slip and oil-resistant

05 为什么要使用模块型疏水防滑地垫? Why use modular drainage anti-slip floor mats





06 疏水防滑地垫的清洁方法

How to clean drainage anti-slip floor mats



长柄刷 Long handle brush



单向收卷锁扣不易散,好移动,便于清洁 Roll up to clean the bottom



高压冲洗搭配中性清洁剂 High pressure washing



派勒·好地垫·好地面



模块拼接式防滑地垫,疏水透气,安全防滑,可任意组合,安装方便,可收卷,搭扣不脱落! Modular mat which is drainage and anti-slip, can be assembled in anyway and easy installation.





吸

孔直径小于4.3mm,不卡高跟鞋,适用于公共卫生间 The hole diameter less than 4.3mm that not stuck the heels and suitable for public toilets





加密设计, 防止卡跟摔倒 Encrypted design to prevent the card from falling

检测报告&专利证书 Test report & patent certificate











自由拼接,时尚感强,适合多场景 Free splicing, suitable for multiple scenes

PNNLER





派勒·好地垫·好地面

搭扣设计, 无缝拼接 Buckle design seamless stitching

柔软可收卷,便于冲洗清洁 Soft and rollable,easy to rinse and clean






表面污垢,毛刷清洁 Use brush cleaning the dirt on surface

半球凸点,可光脚行走,脚感舒适防滑 The dot bump structure allows barefoot walking and feel comfortable



安波4.0&3.0均配备边条,更牢固不易脱落 Equipped with side strips, firm and not easy to fall off





适用区域 Suitable Area

适用于是泳池、健身房、淋浴间、卫生间和盥洗室等需要疏水防滑的区域。 This is applicable to areas that require drainage and anti-slip properties such as swimming pools, gyms, shower rooms, bathrooms, and washrooms.

清洁维护 Cleaning

建议每日用清水冲洗,每两周用中性洗涤剂刷洗后用清水冲洗。 Using hosing daily cleaning, Scrubbing with PH7 cleaner twice a month.

防滑型-安波3.0

30cm

产品名称	安波4.0	安波3.0		
Product Name	Ultrablock4.0	Ultrablock3.0		
材质 Material	医用级软性PVC(可定制抗紫外线) Medical Class Of Soft PVC(Custo	omizable UV resistance)		
结构 Construction	模块拼接,镂空疏水式 Module Splicing,Open & Drainage Water Construction			
尺寸 Size	30×30cm			
厚度 Total Thickness	9mm			
颜色 Color	石墨黑 Graphite black	石墨黑、灰色、宝石蓝、碧波蓝、卡其色 Graphite black, gray, sapphire blue, turquoise blue, khaki		
重量 Weight	345g/PC 3830g/m ²	340g/PC 3770g/m ²		
环保标准 Environmental	GB18586-2001			
阻燃标准 Flammability	GB18624-2012,B1			
防滑等级 Anti-slip Arting	DIN 51130:2014 R10			
产地 Place of Origin	中国 China			
专利产品 Patented Product	是 Yes			
人流量 Footfall	≥5000			
是否配边条	是			
Sidebar	Yes			

技术会数 Technical Specification





模块拼接式浴室、泳池用地垫,疏水防滑,脚感舒适,可任意组合,安装方便! Modular mat can be used in bathrooms, pools areas, which is drainage and anti-slip, comfortable that can be assembled in any way and is easy in installation.





吸 水

图



高立柱,有效防滑,快速疏水 High column for effective anti-slip and drainage



检测报告&专利证书 Test report & patent certificate















自由拼接,整体性强,适合大面积异型场景 Free splicing and strong integrity



日常清洗简易,高压冲洗效果明显 High pressure washing effect is obvious





高压喷枪,清洁便捷 High pressure spray gun for easy cleaning

技术参数 Technical Specification

以本多数 Technicat Specification			
产品名称	安波2.0		
Product Name	Ultrablock		
材质	医用级软性PVC		
Material	Medical Class Of Soft PVC		
结构	镂空疏水式		
Construction	Open & Drainage Water Construction		
尺寸 Size	30×30cm		
重量	390g/pc		
Weight	4330g/m²		
产品总高 Total Height	13mm		
边条尺寸/重量	300×58mm		
Edge Size/Weight	90g/pcs		
转角尺寸/重量	58×58mm		
Corner Size/Weight	20g/pcs		
环保标准	GB18586-2001		
Environmental	ZEK 01.4-08		
阻燃标准 Flammability	B1 (GB8624-2012)		
防滑等级 Anti-slip Arting	DIN 51130:2014 R10		
产地	中国		
Place of Origin	China		
专利产品	是		
Patented Product	yes		
人流量 Footfall	≥5000		

颜色 Available Color




Nava blue




Sea blue











适用区域 Suitable Area

是实验室、食品加工区、酒店、健身房、汽车维修中心、卫生间和盥洗室等区域必不可 少的清洁和劳动保护工具。

It is an essential cleaning and labor protection tool in areas such as laboratories, food processing areas, hotels, fitness centers, auto repair centers, restrooms, and washrooms.


清洁维护 Cleaning

建议每日用清水冲洗,每两周用中性洗涤剂刷洗后用清水冲洗。 Using hosing daily cleaning, Scrubbing with PH7 cleaner twice a month.





特殊合成橡胶材质,柔软抓地,抗油脂,导流疏水结构,安全防滑,可有效缓解疲劳。 Its made of special rubber material with grease resistant, which can fit the ground and water drainage. The mat is not only safe and anti-slip, but also relieves fatigue effectively.





吸






, 什么是耐油型地垫? 、What is an oil-resistant floor mat?

特殊丁腈橡胶材质,抗油脂,抗冷却剂,抗热,超强耐油,适合油烟重区域,例如餐

ty who 厨房,食堂,酒店后厨等区域。 its made of NBR material with anti-grease, anti-coolant, heat-resistant and super oil-resistant, which suitable for industry, kitchens, canteens and other areas.





背面小吸盘设计,更贴合地面 Small suction cup backing fits the ground better



真空负压,抓地力牢 Firm grip on ground with vacuum


negative pressure

拼接型,任意剪裁 Modular type with cutting arbitrary



异型走道拼接,不移位 Modular splicing that no gression

正面圆孔骨架设计,防滑疏水 Surface with circular hole structure which anti slip and leakage



大直径导水孔,有效快速疏水 Wide hole structure for effective and fast drainage

持久站立, 抗疲劳 Anti-fatigue for long standing



缓解腿部压力 Relieve lea pressure

技术参数 Technical Specification

品类 Type	普通型 A型	拼接型 C型	耐油型 E型
材质 Material	橡胶 Rubber	橡胶 Rubber	丁腈橡胶 NBR
尺寸 Size	914×1524mm 610×914mm	914×914mm 1000×1500mm	914×1524mm
厚度 Total Thickness	12mm	9.6mm/20mm	11mm
重量 Weight	8.1kg/pcs 3.2kg/pcs	4.8kg/pcs 13.5kg/pcs	9kg/pcs
孔径 Aperture	26mm 25mm	23mm	21mm
颜色 Color		黑色 Black	
产地 Place of Origin		中国 China	
人流量 Footfall	2500-5000		

清洁维护 Cleaning

建议每日用中性洗涤剂刷洗,阴凉处晾干。 Scrubbing with PH7 cleaner, and dry in the air.

适用区域 Suitable Area

适用于有水,有油,湿滑区域,如厨房,通道,车间,生产流水线等。也可 用于长时间站立区域抗疲劳。 Suitable for areas with water, oil, and slippery conditions, such as kitchens, corridors,

workshops, production lines, etc. It can also be used in areas where prolonged standing is required to combat fatigue.

产品外观 Appearance 普通型A型

耐油型E型

黑色 Black

拼接型C型 黑色

黑色 Black Black

耐油型E型



01 什么是抗疲劳地垫? What is an anti-fatigue mat?

长时间站立的工位,需要放置抗疲劳地垫。抗疲劳地垫是由超强回弹性的材料构成,可有效 缓解因长期站立带来的疲劳感,从而提高工作效率和提升员工满意度。

Work stations that stand for a long time need to place anti-fatigue floor mats. The anti-fatigue floor mat is made of super-resilient materials, which can effectively relieve the fatigue caused by long-term standing. thereby improving work efficiency and employee satisfaction.



格立夫

20m/23mm/26mm

02 抗疲劳地垫越软越好吗? Are the anti-fatigue mats as soft as possible?

不是。好的抗疲劳地垫并不会强调柔软,而是需要材质兼固柔软和长期保持回弹性,往往太软的材料,长期站立会加剧疲劳感,站里面容易形成塌陷。 No. A good anti-fatigue floor mat does not emphasize softness, but requires a material that is both solid and soft and maintains resilience for a long time. The materials that are too soft will aggravate fatigue when standing for a long time, and they are prone to collapse.

03 为何要使用抗疲劳地垫? Why we need to use anti-fatigue mats?

个人长期站在坚硬的地面上,腿部肌肉容易紧张并且收缩,导致静脉曲 张,身体很快出现疲劳。抗疲劳地垫富有弹性材料,可以巧妙地转移人体重


量,从而减少身体疲劳感,提高工作效率。 When a person stands on a hard ground for a long time, the leg muscles tend to tense and

contract, resulting in varicose veins, and the body quickly becomes fatigued. The anti-fatigue floor mat is rich in elastic material, which can transfer the weight of the human body ingeniously, so as to reduce the feeling of physical fatigue and improve work




WELL在人文关怀中已制定标准,建议站立劳动者均需要配备该产品。 WELL has established standards in humanistic care, and it is recommended that all standing workers need to be equipped with this product. (摘自于V02 人体工程学工位设计 部分 4 提供站姿工位支撑)

卓越的抗疲劳效果 Excellent anti-fatigue effect



无抗疲劳地垫



血液充足可持久站立 血液供血不足产生疲劳

04 抗疲劳地垫种类及应用场景 Types and application scenarios of anti-fatigue floor mats







滑





具有艺术质感的毯面和PVC发泡相结合,毯面美观耐磨,PVC发泡能有效减缓长期站立工作带来的身体疲劳,提供舒适的工作条件,四面斜 坡设计,防踢绊,增加安全性。

The carpet surface with artistic texture is combined with PVC foam. The carpet surface is beautiful and wear-resistant, and the PVC foam can effectively reduce physical fatigue caused by long-term standing work and provide comfortable working conditions.

斜坡技术,行走安全,更贴合室内设计 Slope design for walking safety













清洁维护 Cleaning

建议每日用吸尘器清洁,每周两次用清水冲洗,每两周用中 性洗涤剂刷洗后用清水冲洗。

Using vacuum daily cleaning, Hosing twice a week, Scrubbing with PH7 cleaner twice a month.

适用区域 Suitable Area

适用于各种商业环境需要长时间站立工作的区域,如酒店前 台、收银台、保安、迎宾处等。

Suitable for various commercial environments where prolonged standing work is required, such as hotel front desks, cashier counters, security areas, reception areas, etc.

格立夫颜色









深灰色 舒立夫颜色

黑色





棕色



扁皮编织

林立夫颜色



圆丝编织





技术参数 Technical Specification

产品型号 Type	格立夫 Gran-tuff	舒立夫 Schul-tuff	林立夫 Link-tuff
毯面纱线类型 Carpet Material	PP	抗静电尼龙纤维	PVC
纱线结构 Yarn Construction	针刺绒头截面 NPC	热定型簇绒状截绒开放式结构 Heat Set tufted cut pile opended comstruction	扁皮编织/圆丝编织/扁丝编织 Flat leather weaving / round silk weaving / flat silk weaving
超厚刮沙垫底类型 Bottom of Scraping Mat	PVC发泡	PVC发泡	PVC发泡
总高 Total Height	20mm/23mm/26mm	18mm/21mm/24mm	12mm/15mm/18mm
重量 Total Weight	7050/7500/8500g/m²	6700/7150/8150g/m²	4800/5200/6200 g/m²
阻燃等级 Flammability	GB8624-2012:B1	GB8624-2012:B1	Bf1-s1 (EN 13501-1)
尺寸 Size	Sheet: 60cm×100cm, 100cm×150cm Roll: 100cm, 200cm Width, 可定制		
产地 Place Of Origin	中国 China	中国 China	中国 China
人流量 Footfall	≥5000	≥5000	≥5000






抗疲劳地垫是目前员工长期站立工作区域内运用广泛的地垫,能有效减缓由于长期站立工作带来的身体疲劳,从而保证了工作效率。 Anti-fatigue mats are currently the most widely used mats in the long-term standing work area of employees, which can effectively reduce physical fatigue caused by long-term standing work, thereby ensuring work efficiency.

优质材料,使用寿命长 Two-layer structure for long service life





×市面上同类产品分三层结构,发泡层和耐磨层之间会加一层材质较差的 EVA发泡层,密度和回弹性差。


√派勒稳得福两层结构,高密度PVC发泡层,回弹性好,持久耐压,有效缓解脚部压力,减少疲劳感。

贴合地面,不起翘,图案可定制,多场景适用 Fits the ground and anti-warp, and also the pattern can be customized

技术参数 Technical Specification

	经济型 Economical	耐磨型 Wear-resistant
材质 Material	高强度PVC发泡 PVC layer+spong	高强度PVC发泡 PVC layer+spong
表面花纹 Pattern	钢板纹 + 警示黄边(可选) steel plate+yellow edge	钢板纹 + 警示黄边(可选) steel plate+yellow edge
幅宽 Width	60cm/90cm/120cm	60cm/90cm/120cm
卷长 Roll Length	1800cm	1800cm
厚度 Total Thickness	9mm/12mm/15mm	13.5mm/16.5mm/19.5mm
重量/m² Weight/m²	2850g/2950g/4100g	7830g/8330g/9330g
颜色 Color	黑色/黑色+黄边 Black/Black+Yellow	黑色/黑色+黄边 Black/Black+Yellow
是否防静电 Anti-static	可定制 Customizable	可定制 Customizable
产地 Place of Origin	中国 China	中国 China
人流量 Footfall	≥5000	≥5000

剖面图 Profile Map







清洁维护 Cleaning

建议每日用吸尘器清洁,每周两次用清水冲洗,每两周用中性洗涤剂刷洗后用清水冲洗。 Using vacuum daily cleaning, Hosing twice a week, Scrubbing with PH7 cleaner twice a month.

适用区域 Suitable Area

适用于各种商业环境需要长时间站立工作的区域,如酒店前台、收银台、迎宾处等。 Suitable for areas in various commercial environments where standing work is required for a long time, such as hotel front desks, cash registers, and reception areas.

颜色 Available Color







Yellow+black

可定制logo Customizable logo







产品表面采用创新的空气泡窟缓冲结构,能够给长时间站立的工人提供缓解疲劳的舒适体验,从而提高生产工作效率,橡胶材质的模块式 拼接结构,能够灵活应对各种场合需要。

The product features an innovative air bubble cushioning structure on the surface, providing a comfortable experience that helps alleviate fatigue for workers engaged in prolonged standing tasks. This, in turn, enhances productivity in their work. The rubber material and modular interlocking design allow for flexible adaptation to various environments and requirements.

卡扣拼接,适合异型铺设,不移位

Snap splicing suitable for speical shaped laying without gression





技术参数 Technical Specification

材质	特殊橡胶材质	规格	440mm*590mm
Material	Rubber	Size	
表面结构	空气球囊	重量	2.3kg/pcs
Pattern	Half-ball Hump	Weight/m²	
厚度 Total Thickness	15mm	人流量 Footfall	2500-5000

清洁维护 Cleaning

建议每日用吸尘器清洁,每周两次用清水冲洗,每两周用中性洗涤剂刷洗后用清水冲洗。


Using vacuum daily cleaning, Hosing twice a week, Scrubbing with PH7 cleaner twice a month.

适用区域 Suitable Area

适用于各种需要员工长时间站立工作的区域,比如流水线,机器设备周边,接待台, 服务台,物流包装车间。

This is suitable for various areas where employees need to stand for long periods of time, such as assembly lines, machinery and equipment areas, reception desks, service counters, logistics packaging workshops.





水 吸 油







采用环保橡胶材质,缓冲效果好,可有效保护地板和运动器械,并能提供各种花式选择。 It use environmental-friendly rubber material for great buffer effect that can effectively protect the floor and instruments, and which provide kinds of fancy choices.







技术参数 Technical Specification

材质 Material	橡胶 Rubber
尺寸 Size	Sheet: 50×50cm/60×60cm/100×100cm Roll: 黑色1.25m×20m 黑色+彩色星点1.25m×20m 彩色1m×20m
产品重量 Total Weight	1150g/1mm/m²
厚度 Total Thickness	2~12mm
产地 Place Of Origin	中国 China
人流量 Footfall	≥5000

适用区域 Suitable Area

可铺在健身房、休闲娱乐中心、滑冰场、家庭、庭院、露台等。 It can be installed in gyms, recreational centers, ice skating rinks, homes, gardens, patios, etc.

清洁维护 Cleaning

建议每日用吸尘器清洁,每周两次用清水冲洗,每两周用中性洗涤剂 刷洗后用清水冲洗。

Using vacuum daily cleaning, Hosing twice a week, Scrubbing with PH7 cleaner twice a month.

颜色 Available Color







黑色+彩色星点



红色 (可定制彩色) Red (customizable)

文 印 染


吸 水 吸 油

防 滑

疲









模块拼接式地垫,安装简易方便,既安全防滑,又有效保护地面不受磨损,耐叉车重压,抗油脂耐腐蚀,适用于工厂车间,停车场, 汽车展示厅等场所。

The modular spliced floor mat is easy to install, safe and anti-slip, and effectively protect the ground from abrasion. It can withstand the heavy pressure of forklifts, and is resistant to grease and corrosion. It is applicable to factory workshops, parking lots, car showrooms and other places.

卡扣拼接,适合异型铺设,不移位 Snap splicing suitable for speical shaped laying without gression






卡扣拼接,无缝隙,更平整 Snap stitching, no gaps more flat

搭配边条,更贴合地面 Used with edge strips and fits the ground better





可配边条 Can be equipped with edge strips

技术参数 Technical Specification

IX/NSX recini	icat specification		
厚度 Total Thickness	4.5mm	6.5mm	
材质 Material	PVC	PVC	
结构 Construction	互锁式拼装模块 Interlocking Mat	互锁式拼装模块 Interlocking Mat	
表面花纹 Pattern	铆钉纹/树皮纹 Rivet/Dot	铆钉纹/树皮纹 Rivet/Dot	
尺寸 Size	457×457mm	500×500mm	
边条尺寸 Edge Size	457×67mm(短边) 527×67mm(长边)	500×120mm	
每块重量 Pile Weight	1100g/1350g	1800g	
颜色 Color	灰色/蓝色/黄色/红色/黑色 Grey/Blue/Yellow/Red/Black	灰色/蓝色/黄色/红色/黑色 Grey/Blue/Yellow/Red/Black	
退色性(级) Color Fading Class	6.5	6.5	
耐磨等级 Wearing Class	T级(EN 660-2:1999+A1:2003 and EN 649:2011)		
阻燃等级 Flammability	GB18624-2012: B1	GB18624-2012: B1	
最高电压 Maximum Voltage	3500V	3500V	
产地 Place of Origin	中国 China	中国 China	
人流量 Footfall	≥5000	≥5000	

清洁维护 Cleaning

建议每日用吸尘器清洁,每周两次用清水冲洗,每两周用中性洗涤剂刷洗后用清水冲洗。 Using vacuum daily cleaning, Hosing twice a week, Scrubbing with PH7 cleaner twice a

适用区域 Suitable Area

适用于工业商业等需要地面保护区域,如电梯,通道,健身房,生产流水线等。 Suitable for industrial and commercial areas that require floor protection, such as elevators, corridors, gyms, production assembly lines, etc.

纹理 Texture











绿色 Green

油



派勒专利研发针对男卫生间专用的尿斗垫,吸湿布可锁住滴漏尿液避免挥发;底部防水避免腐蚀大理石地面;立体骨架避免脚踩尿液二次 污染;一次性吸湿布,2-4周替换一次,方便快捷。

Paaler patented urinal pads for men bathrooms. Moisture-absorbing cloth can lock dripping urine, and which the bottom is waterproof to avoid corrosion of marble floors. Its skeleton avoids secondary pollution of urine when feet are stepped on, and the cloth replace once 2-4 weeks, which is convenient and fast.

保护地面,耐腐蚀 Protect the ground and resist corrosion



天然石材容易被污渍腐蚀,需铺设卫洁,起到保护作用 Natural stone ground is easily corroded by stains and needs to be laid Urinal system to protect.

与市面同类产品对比

Compare with similar products on the market



骨架隔离疏水,避免踩到尿液 The skeleton isolates drainage to avoid stepping on urine.



鞋底直接碰到尿液,产生二次污染 The sole directly touches the urine, secondary pollution.

操作简单,可一次性替换 Disposable replacement



采用卡扣固定,便于更换强力吸湿材料 Fastened with snaps for easy replacement of strong moisture-absorbing materials.

密集疏水导流孔结构 扁扁桃木 避免麻烦尿液污渍





技术参数 Technical Specification

骨架材质 Frame Material	聚丙烯 PP
骨架颜色 Frame Color	黑色/棕色 Black/Brown
外观尺寸 Outline Size	43×51cm
吸水布颜色 Absorbent Material Color	红色/黄色/棕色/黑色 Red/yellow/Brown/Black
可更换吸湿布尺寸 Outline Size	43×51cm
产品重量 Total Weight	197g/pcs
产品总高 Total Height	4mm
产地 Place Of Origin	中国 China
人流量 Footfall	< 2500

颜色 Available Color



Red

Yellow





Brown

Black

其他产品 Other products

卫香尿斗香块系列

生物酶技术抑菌除味; 直接分解尿液中的异味; 可以袪除下水道中尿垢。



卫丽超级防溅尿斗阻隔片

防溅效果最佳,做到零溅出; 抑制金黄色葡萄球菌的滋长; 芳香效果持久能达45天以上: 更适合高档场所使用。



卫清啫喱尿斗阻隔片系列

30天时间持续有效除息: 减少小便池冲水量, 节水效果; 防溅设计,避免尿液溅到衣裤; 采用可生物降解绿色环保材料; 香型多样。




卫风尿斗阻隔片系列

采用环保PVC材料制造: 有很好的阻隔烟头等杂物效果;



吸



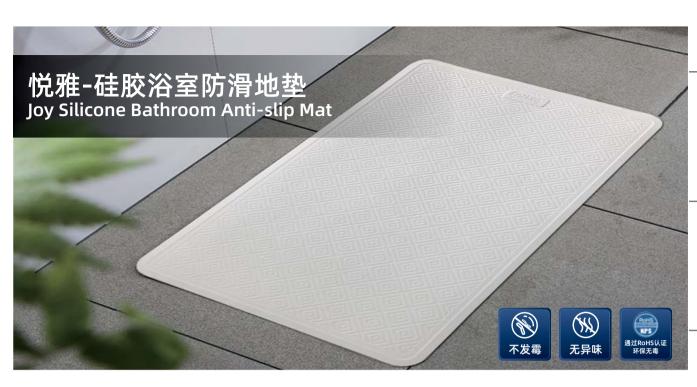

柔软而富有弹性的硅胶防滑垫,表面特有凹凸纹理,耐用防滑,安全环保,无毒无味,不易产生霉菌。


The soft and elastic anti-slip mat with bump texture surface that durable and anti-slip. It's safe and environmentally friendly, which is non-toxic and anti mold.





正面纹理防滑,背面圆形吸盘,遇水抓地更牢固,防滑性能更好 Anti-slip texture on the front and round suction cup on the back for firm and anti-slip.

与同类产品对比 Compare with similar products



普通橡胶垫容易发霉、脆裂 Ordinary rubber pads are easy to mold and crack.

悦雅硅胶韧性好,抗菌不发霉 Silicone has good toughness, antibacterial and no mildew.





技术参数 Technical Specification

材质	硅胶
Material	Natural Silicone
背底	吸盘式
Backing	Sucker Type
尺寸 Size	570×350mm
产品重量 Total Weight	540g/pcs
颜色	白色
Color	White
产地	中国
Place Of Origin	China
人流量 Footfall	< 2500

适用区域 Suitable Area

适用于酒店客房各种浴室、淋浴房地面,以及浴缸内;家用亦可。 Suitable for hotel guest room bathrooms, shower floors, and bathtub interiors; also suitable for home use.

清洁维护 Cleaning

定期清洗,用清水刷洗,保持清洁; 使用完后悬挂晾干放阴凉处,避免阳光直晒。 Regular cleaning, scrub with water, keep clean; After use, hang dry and put in the shade to avoid direct sun.



配件 Accessories

01 地垫边条三种尺寸 Three Size Floor Mat Edges

小型地垫胶边条 Small floor mat rubber edge strip


小型胶边最低,适用于大部分地毯型地垫,底背大约2mm的产品。 The small rubber edge is the lowest, suitable for the mors of the type floor mats, and the bottom back is about 2mm.



中型地垫胶边条 Medium floor mat rubber edge strip

中型边条高度适中,主要用于艾肯、剑达产品。


The medium-sized edge strip is mainly used for thick blanket type product, such like Paaler Akon and lett.




重型地垫胶边条 Large floor mat rubber edge strip

重型边条高度最高,目前主要用于皮克斯、皮卡索模块地垫异形收边使用。 The height of the heavy-duty edge strip is the highest. At present, it is mainly used for the special-shaped edge closing of the Pixor and Picasso modular floor mats.

02 地垫边条安装方法 Mat edge strip installation method



延边处切掉多余边条 Cut off excess edges



边条转角处切割45° Cut 45° at the corner of the edge strip



两条对角45°贴合,在边条上涂抹胶水 45° diagonal fit, apply glue on the edge



最后将毯面压合在边条上 press the blanket surface to the edge

* 所需工具: 度量尺、美工刀、胶水 Tools needed: measuring ruler, utility knife, glue

03 地垫边条配件参数 Accessories parameters

	小型地垫胶边条	中型地垫胶边条	重型地垫胶边条	地垫接驳条	特殊胶水
	Small rubber edge strip	Medium rubber edge strip	Large rubber edge strip	Floor mat connecting strip	Special glue
材质 Material	PVC	PVC	PVC	PVC	1
特点 Characteristic	柔软耐磨,抗紫外线 Soft, wear-resistant, UV resistant	柔软耐磨,抗紫外线 Soft, wear-resistant, UV resistant	柔软耐磨,抗紫外线 Soft, wear-resistant, UV resistant	坚韧柔软,不断裂 Tough and soft without breaking	粘接牢度高 High adhesion fastness
厚度	总高4.0mm	总高4.5mm	总高10.5mm	宽度5.5cm	1
Thickness	Total height4.0mm	Total height4.5mm	Total height10.5mm	Width 5.5cm	
颜色	黑色	黑色	黑色	黑色	透明
Colour	Black	Black	Black	Black	Transparent
包装规格	100米/箱	100米/箱	80米/箱	10米/卷	50克/瓶
Package specification	100m/box	100m/box	80m/box	10m/volume	50g/bottle

04 其他配件 Other Accessories

胶水

地垫胶边条用特殊胶水粘于地垫底背并外露斜坡边。 胶水适用于PVC材质及橡胶材质的粘接,粘接牢度高。


*本产品通过权威机构检测,安全可靠。



	女主可靠 Safe and reliable			
****	100.00 100.00 100.00	****	****	
earn (play	68	484	40.	
E (phy)		****	50	
Tallet .	J. 100	A7044	. **	
AREASKA (gt.)	100		86	



接驳条 纯PVC环保材质,厚度0.5mm, 超薄但坚韧耐用,抗撕裂。







地垫清洁维护保养指南 Floor Mat Cleaning and Maintenance Guide

01 维护保养 Maintenance



外包装破损,请不要签收!

地毯型地垫一般是卷装纤袋包装。请您在收到商品时,确认包装是否完好,如有破损,请不要签收,并请立即联系派勒客服,我们会与物流方协商并了解原因, 争取赔偿。



地垫打开时不平整,是质量问题吗?

部分卷装的地毯型地垫,打开时可能会产生四周不平整、拼接缝、LOGO拼接等区域弯曲翘起等现象。以上情况均不属于产品质量问题,请您无需担心,派勒出 厂产品均通过质检合格。该现象通常产生于地垫材质越厚、或越硬、或天气遇冷,或卷起时间越长,则越容易发生,该弯曲翘起是可以平复的;天气越热、时间 铺设时间越久,则平复状态越好。如果您比较着急,可以放在太阳下直射软化,或用外力平压等方法处理平整。



从不同方向看地垫,颜色看上去似乎不一样?

地毯型地垫是一种清洁工具,为了更好的去除鞋底尘土砂石,地毯型地垫的纱线不会很密,要留有容尘空间。因此,踩踏或挤压后,纱线会有一定的倒伏,这就是 绒向。视觉上,从不一样的方向和角度去看,会存在一定的颜色差异。两幅拼接的地垫由于拼缝两边的地垫倒伏方向不完全一致,拼接缝会看起来比较明显,似乎 有一定的色差。

以上均不是色差问题,请您无需担心。随着地垫的使用和日常维护,绒向会逐渐恢复,并趋于一致,有拼接缝和色差的问题会改善与消失。



地垫包装中的纸卷芯,请不要扔掉!

地垫收卷时需要它,可以在存储时更好的保护地垫。

02 清洁方法 Cleaning method

- ① 日常清洁: 直立式滚刷吸尘器
- 高人流区域 —— 每天
- 低人流量区域 —— 2-3天
- *强烈建议使用直立式滚刷吸尘器!能够将纱线根部的灰尘翻起,吸尘更彻底,并起到修整簇绒的效果!





清洗后用出风机吹干,每60天进行一次。



清洗后用出风机吹干,每60天进行一次。




③ 顽固污渍 对于顽固污渍,可在高压水枪/地毯

清洗机中配以中性清洁剂进行清洗。



03 收卷方法 Rolling method



地垫必须卷起来收卷。毯面朝内,背底朝外收卷。请不要折叠地垫! 收卷地垫时应使用纸卷轴,以避免 出现大面积死折及卷痕。当地垫卷 度大于四米时,需上人同时进行卷 收,两人在卷头,一人在卷中。



卷收过程中如果需要移动地垫请勿 直接扯拽边条,可在地垫毯面内弯 折5公分抓握住地垫,从而进行移 动。



卷收后,如比较松散,可继续向 前滚动一段距离,直至地垫卷 紧。

04 存放方法 Storage method



地垫上方禁止压放重物。



地垫应平躺存放,禁止竖向立起存放,避免边条 断裂。



长时间不使用的地垫,存放时一定要放置卷轴。



长时间不使用的地垫,需做好外包装保护,避 免硬物剐蹭等造成破损问题。

04 注意事项 Cautions



请勿用烟头或其它明火烧灼地垫。



冬天气温较低,地垫面积较大时,请尽量避免多次移动卷收。



地垫产品具有热胀冷缩性,日晒受潮易膨胀。建议铺设时,不要完全顶墙或者顶到井坑边缘,需留有3%左右的缝隙,以防产品日晒或受潮后起鼓包,影响美观,并产生绊倒人的安全隐患。



请勿使用尖锐物体割划地垫。



请避免过重、局部压强过高的物体压过地垫,如细轮车、载重车等。如 需通过,请使用三合板等硬质板材放在地垫上方。



请勿拉拽、折弯边条。



请避免长距离拖拽移动;如需移动,可使用小推车搬运。



www.paalermat.com

上海派勒环保科技有限公司

Shanghai PAALER Environmental Protecting Technology Co., Ltd.

中国上海浦东新区金海路1000号金领之都51号楼2F 邮编: 201206 Tel: +86 21 38767886 Fax: +86 21 38767846 2F, Building 51, No.1000 Jinhai Road, Pudong New District, Shanghai , China